


# MAINTENANCE & TROUBLESHOOTING MANUAL

SERIAL NO. \_\_\_\_\_

# PS-1030 PS-1430 PS-1930



To view machine specific information on your mobile device, scan the code to the left.

Decals with this code can also be found on the manual box and base of the machine.



## PRO SERIES

MOBILE  
ELEVATING  
WORK  
PLATFORMS

ANSI A92.20  
CSA B354.6:17  
EN-280:2013+A1:2015

PS5.0-M | REV C

**This manual refers to serial number(s):**




- PS-1030** PS10-50001 -
- PS-1430** PS14-50001 -
- PS-1930** PS19-50001 -

**For older Serial Numbers refer to our website:**  
[www.hybridlifts.com/Manuals.htm](http://www.hybridlifts.com/Manuals.htm)



**Register your Hy-Brid Lift at:**  
[www.hybridlifts.com/RegisterOnline.htm](http://www.hybridlifts.com/RegisterOnline.htm)  
to receive product updates and service bulletins.

**General Information**



2647 Hwy 175  
Richfield, WI 53076  
U.S.A.

-  +1-262-644-1300
-  +1-262-644-1320
-  [www.hybridlifts.com](http://www.hybridlifts.com)

**Service Information**

-  +1-262-297-5195
-  [webservice@hybridlifts.com](mailto:webservice@hybridlifts.com)

**Parts Information**

-  +1-262-297-5196
-  [webparts@hybridlifts.com](mailto:webparts@hybridlifts.com)

**Original instructions are written in English**

The purpose of this Maintenance Manual is to provide qualified service personnel with information for servicing and maintaining Hy-Brid Lifts. All information in this manual must be read and understood before any attempt is made to service this machine.

The operation and safety manual is considered a part of the work platform and contains instructions and operating procedures essential to properly and safely operate the Custom Equipment Hy-Brid Lift. Users must read and understand all information in the Safety and Operations Manual before operation.



**DANGER**  
THE OPERATION AND SAFETY MANUAL MUST BE  
READ AND UNDERSTOOD PRIOR TO OPERATING THE  
MACHINE.

- The user/operator should not accept operating responsibility until the manual has been read and understood as well as having operated the lift under supervision of an experienced and qualified operator.
- Because the manufacturer has no direct control over machine application and operation, proper safety practices are the responsibility of the user and all operating personnel.




**WARNING**  
ANY MODIFICATION ON THIS MACHINE WITHOUT  
THE EXPRESS WRITTEN CONSENT OF THE  
MANUFACTURER IS PROHIBITED.

**Register your Hy-Brid Lift at:**  
[www.hybridlifts.com/RegisterOnline.htm](http://www.hybridlifts.com/RegisterOnline.htm)

**Register your Hy-Brid Lift to:**

- Recieve product updates and recalls
- Recieve service bulletins, product and part recalls, and other important notifications
- Comply with ANSI A92.20 Standards
- Provide better records for service



**WARNING**

REGISTERING YOUR MEWP WITH THE  
MANUFACTURER IS AN ANSI A92.20  
REQUIREMENT.

**FORWARD** ..... 3

**TABLE OF CONTENTS** ..... 4

**SECTION 1 SAFETY** ..... 6

1.1 | SAFETY SYMBOLS ..... 6

1.2 | GENERAL RULES AND PRECAUTIONS ..... 6

1.3 | SAFETY GUIDELINES ..... 7

**SECTION 2 MAINTENANCE** ..... 8

2.1 | BATTERY MAINTENANCE ..... 8

2.2 | CHARGING THE BATTERY ..... 8

2.3 | LUBRICATION ..... 10

2.4 | COMPONENTS REQUIRING ADJUSTMENT ..... 10

2.5 | EXAMINATION, REPAIR, REPLACEMENT OF LIMITED LIFE COMPONENTS ..... 10

2.6 | SAFETY DEVICES AND SYSTEMS REQUIRING CHECKS ..... 10

2.7 | STORAGE ..... 10

2.8 | MAJOR ALTERATIONS OR REPAIRS ..... 10

**SECTION 3 MAINTENANCE CHECKLISTS** ..... 12

3.1 | PRE-START INSPECTION CHECKLIST ..... 12

3.2 | PRE-DELIVERY/ANNUAL/FREQUENT INSPECTION CHECKLIST ..... 14

**SECTION 4 TECHNICAL REFERENCES** ..... 16

4.1 | HYDRAULIC SCHEMATIC ..... 16

4.2 | ELECTRICAL SCHEMATIC ..... 18

4.3 | CONTROL BOARD DIAGNOSTIC ..... 20

**SECTION 5 WIRING DIAGRAMS** ..... 22

5.1 | WIRING DIAGRAM ..... 22

5.2 | MACHINE HARNESS WIRING DIAGRAM ..... 24

5.3 | LOWER CONTROL WIRING DIAGRAM ..... 26

5.4 | UPPER CONTROL WIRING DIAGRAM ..... 28

**SECTION 6 TROUBLESHOOTING FLOWCHARTS** ..... 30

6.1 | MAIN POWER/SAFETY CIRCUIT ..... 30

6.2 | DRIVE CIRCUIT ..... 32

6.3 | STEER CIRCUIT ..... 34

6.4 | ELEVATE CIRCUIT ..... 36

6.5 | LOWER CIRCUIT ..... 38

**SECTION 7 PARTS** ..... 40

**SECTION 8 WARRANTY** ..... 42

8.1 | LIMITED WARRANTY ..... 42

8.2 | LIMITED WARRANTIES ..... 42

8.3 | EXCLUSIONS/WHAT IS NOT COVERED ..... 42

8.4 | MAKING A WARRANTY CLAIM ..... 42

8.5 | EXCLUSIVE WARRANTY REMEDIES ..... 43

8.6 | DISCLAIMER OF OTHER EXPRESS AND IMPLIED WARRANTIES ..... 43

8.7 | LIMITATION OF LIABILITY ..... 43

**SECTION 9 INSPECTION & REPAIR LOG** ..... 44

**INDEX OF FIGURES**

FIGURE 1: Maintenance Lock Use .....7

FIGURE 2: Maintenance Lock Storage .....7

FIGURE 3: Battery Location .....8

FIGURE 4: Charger Cord Location .....8

FIGURE 5: Battery Charger LED Display .....9

FIGURE 6: LED Light Diagnostic Location .....20

FIGURE 7: EZ Cal Handheld Controller .....20

**REVISION LOG:**

REV A ..... May 2020

REV B ..... November 2020

REV C ..... January 2022

1.1 | SAFETY SYMBOLS



**DANGER**

FAILURE TO FOLLOW THIS WARNING WILL CAUSE DEATH OR PERSONAL INJURY.

"DANGER" indicates an imminently hazardous situation, which, if not avoided, will result in death or serious injury.



**WARNING**

FAILURE TO FOLLOW THIS WARNING MAY CAUSE DEATH OR PERSONAL INJURY.

"WARNING" indicates a potentially hazardous situation, which, if not avoided, could result in death or serious injury.



**CAUTION**

FAILURE TO FOLLOW THIS WARNING MAY CAUSE INJURY OR DAMAGE TO EQUIPMENT.

"CAUTION" indicates a potentially hazardous situation which, if not avoided, could result in minor or moderate injury or damage to equipment.

1.2 | GENERAL RULES AND PRECAUTIONS

An operator of any type of work platform is subject to certain hazards that cannot be protected by mechanical means. It is therefore essential that operators be competent, careful, physically and mentally fit, and thoroughly trained in safe operation of this machine.

Although Custom Equipment, LLC conforms to specified ANSI, OSHA and CSA, it is the responsibility of the owner to instruct operators with the safety requirements made not only by Custom Equipment, LLC, but by the various safety boards in your area, as well as additional requirements set forth by ANSI, OSHA or CSA. If you come across a situation that you think might be unsafe, stop the platform and request further information from qualified sources before proceeding.



**WARNING**

MAINTENANCE INFORMATION IS FOR USE BY TRAINED PERSONNEL ONLY.



**WARNING**

NEVER REACH BETWEEN SCISSORS LINKS OR PROP UP PLATFORM UNLESS MAINTENANCE PINS ARE IN PLACE.

1.3 | SAFETY GUIDELINES

**Maintenance Lock**

The maintenance lock must be placed into position whenever the machine is being serviced in the raised or partially raised position. Serious injury and/or death could result if maintenance lock is not used properly.

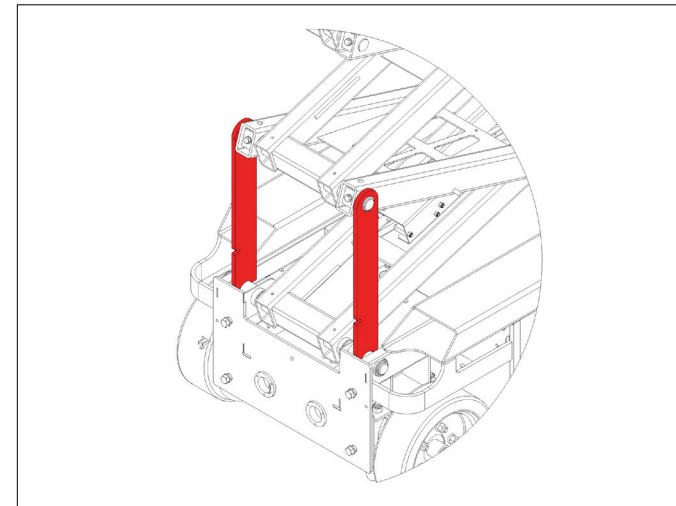


FIGURE 1: Maintenance Lock Use

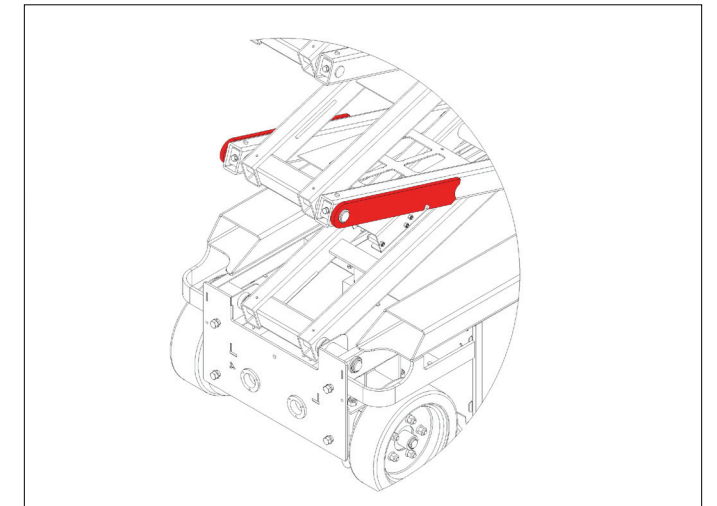


FIGURE 2: Maintenance Lock Storage



**WARNING**

FAILURE TO COMPLY WITH THE LISTED SAFETY PRECAUTIONS MAY RESULT IN MACHINE DAMAGE, PERSONNEL INJURY, OR DEATH.

**Other Guidelines**

- Never work under an elevated platform until maintenance locks have been engaged.
- Remove all rings, watches, and jewelry when performing any maintenance.
- Do not wear long hair unrestrained or loose fitting clothing and neckties which may become caught on or entangled in equipment.
- Observe and obey all warnings and cautions on machine and in manual.
- Keep oil, grease, water, etc. wiped from standing surfaces and handholds.
- Before making any adjustments, lubricating or performing any other maintenance, shut off all power controls.
- Battery should always be disconnected during replacement of electrical components.
- Keep all support equipment and attachments stowed in their proper place.
- Use only approved nonflammable cleaning solvents.
- After maintenance, inspect the machine as described for Pre-delivery.

2.1 | BATTERY MAINTENANCE

This unit is equipped with deep cycle 12-volt batteries. The care and maintenance of your batteries has much to do with how well this unit functions. Battery wiring and water level should be checked monthly. Do not overfill. When the cells are too full, fluid will seep out when charging. The solution is at its proper strength when the battery is manufactured. Use distilled water and keep fluid up to proper level. When required, water should be added to battery after charging, unless water level is below the plates.

- Remove side cover to access battery.
- Remove battery caps and check fluid level.
- Fill each cell (if needed) to split ring with distilled water.
- Reinstall caps.
- Wash all dirt, debris, acid, etc., off battery whenever corrosion is detected. Use a solution of 5ml baking soda per 0.95 liters of warm water.
- Coat terminals with a commercially available coating.
- Close cabinet and latch in place.

**NOTE:** The surrounding temperature greatly affects the power reserve within a battery.

**EXAMPLE:** A battery that is 100% charged at 80° F (27°C) drops to 65% at 32°F (0°C). At 0°F (-18°C), this battery will drop to 40% efficiency.

2.2 | CHARGING THE BATTERY

The charger may include an interlock circuit. If so equipped, the unit will not operate while charging.

**To Charge:**

- Park the machine on a level surface.
- Plug charger into AC outlet until charged.
- For best battery life, leave the charger plugged in until machine will be used again. The charger will maintain the battery charge.

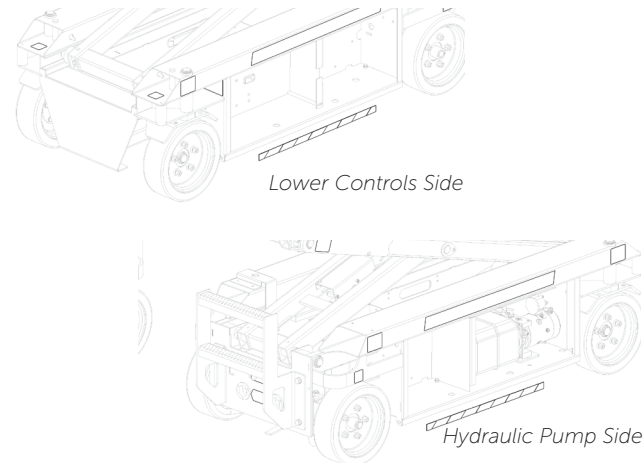


FIGURE 3: Battery Location

**CAUTION**  
NEVER ADD ACID TO BATTERY!

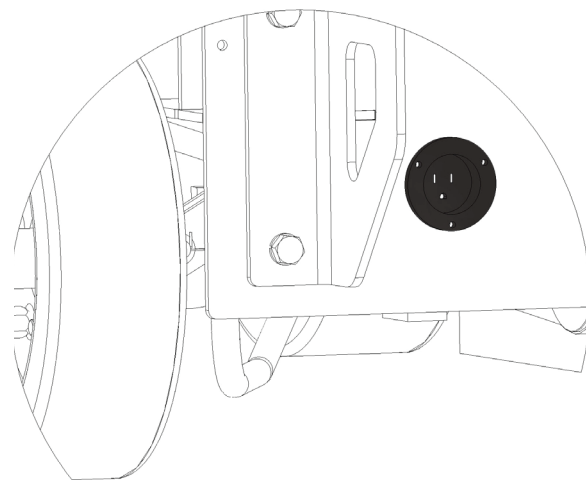


FIGURE 4: Charger Cord Location

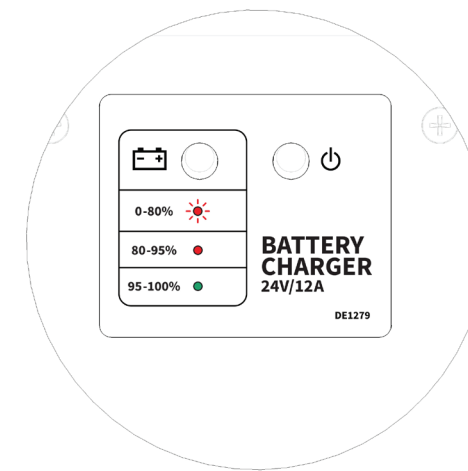


FIGURE 5: Battery Charger LED Display













**WARNING**

BATTERIES GENERATE EXPLOSIVE GASES. KEEP SPARKS AND FLAME AWAY FROM BATTERIES. DO NOT SMOKE WHILE CHARGING.

**WARNING**

DO NOT OPERATE UNIT WHILE CHARGING. DO NOT DISABLE CHARGER INTERLOCK.

**Battery Charge Display:** Pro Charging Systems IS2412

		MEANING
 (OFF)	 (SOLID)	<b>Standby Mode</b> (Or battery/ connection error)
 (FLASHING)	 (SOLID)	<b>Normal Charging</b> Bulk Charging
 (SOLID)	 (SOLID)	<b>Normal Charging</b> Absorption Stage
 (SOLID)	 (SOLID)	<b>Charge Complete</b> Flat/Maintenance Mode
 (FLASHING)	 (FLASHING)	<b>Charger Error</b>

**2.3 | LUBRICATION**

Item	Specification	Frequency of Lubrication
Wheels	Teflon Spray	Quarterly

**2.4 | COMPONENTS REQUIRING ADJUSTMENT**

Under normal use, no components should require adjustment. Contact the manufacturer if adjustments are required.

**2.5 | EXAMINATION, REPAIR, REPLACEMENT OF LIMITED LIFE COMPONENTS**

With proper use, regular battery charging, and regular inspection, there are no limited life components that require routine replacement.

**2.6 | SAFETY DEVICES AND SYSTEMS REQUIRING CHECKS**

Check safety functions as part of daily inspection. Check that the brakes are holding.

**2.7 | STORAGE**

After periods of storage, exposure to extremes of ambient conditions-heat, cold, moisture, dust etc. inspect the machine. Batteries will need to be charged. Refer to the Pre-Delivery/Frequent Inspection Checklist in the Maintenance Manual.

**2.8 | MAJOR ALTERATIONS OR REPAIRS**

Any alterations must be approved by the manufacturer. Major repairs, which affect the stability, strength, or performance of the machine must also be approved by the manufacturer, recorded, and include machine inspection and testing. Never attach pipe racks, material lifting devices, or make any other alteration that is not part of the intended design of the machine.

**THIS PAGE WAS INTENTIONALLY LEFT BLANK**



**FAILURE TO PERFORM INSPECTIONS AND PREVENTATIVE MAINTENANCE AT RECOMMENDED INTERVALS MAY RESULT IN THE UNIT BEING OPERATED WITH A DEFECT THAT MAY RESULT IN INJURY OR DEATH OF THE OPERATOR.**

Regular inspection and conscientious maintenance is important to efficient economical operation of this machine. It will help to assure that equipment will perform satisfactorily with minimal service and repair. Make checks at the stated intervals or more frequently if required by local operating conditions. The following inspection checklists are included in this manual:

- Pre-Start (required before operation at each work shift)
- Pre-Delivery/Frequent/Annual (Required every 3 months, after periods of storage, and after any alterations or repairs)

The rated life of the machine is Light Intermittent Duty (typical use 10 years, 40 weeks per year, 20 hours per week, 5 load cycles per hour).

**3.1 | PRE-START INSPECTION CHECKLIST**

- Keep inspection records up-to-date.
- Record and report all discrepancies to your supervisor.
- A dirty machine cannot be properly inspected.



**THIS CHECKLIST MUST BE USED AT THE BEGINNING OF EACH SHIFT OR AFTER EVERY SIX TO EIGHT HOURS OF USE. FAILURE TO DO SO COULD AFFECT THE SAFETY OF THE OPERATOR.**

**PRO SERIES PRE-START INSPECTION CHECKLIST**

(Print this page for additional inspections)

Model: \_\_\_\_\_ Serial No. \_\_\_\_\_

Y-Yes/Acceptable N-No/Unacceptable R-Repaired N/A-Not Equipped	Y	N	R	N/A
<b>VISUAL INSPECTIONS</b>				
There are no loose or missing parts.				
Check that warning and instructional labels are legible and secure. Ensure that load capacity is clearly marked.				
Check the platform rails and safety gate for damage.				
Platform and base controls are not missing, damaged, or disconnected.				
Electrical cables and wires are not torn, frayed, or disconnected.				
Hydraulic hoses are not torn or loose, and there are no leaks. Hoses and the cables have no worn areas or chafing.				
If machine is equipped with LeakGuard check tray for hydraulic fluid				
Check the tires for damage.				
Check that all snap rings are secure in grooves on pivot pins.				
<b>FUNCTIONAL TESTS</b>				
Gate closes automatically and latches.				
Platform Controls: Check all switches and push buttons for proper operation.				
Emergency Stop (Stops all movement)				
Drive Mode Button (Selects drive/steer mode)				
Up/Down Button (Selects elevate mode)				
Joystick: (Return to neutral, drives forward & reverse.) Enable Trigger (Must be activated for joystick-operated movement) Rocker Switch (Moves front wheels left and right) Elevates & lowers				
Horn sounds when button is pressed.				
Information button cycles through battery life (percent), load capacity (percent), and hour meter (hours) when pressed.				
Base Controls: Check all switches and push buttons for proper operation.				
Emergency Stop (Stops all movement/Disconnects battery)				
Key Switch/Master Power Switch (Selects Platform Control, Ground Control, or Off )				
Up/Down Rocker Switch (Elevates, Lowers)				
Descent/Tilt Alarm (Not damaged, sounds for descent; may also sound for drive & elevate, if so equipped)				
Wheels: Front wheels rotate freely. They are not bent, and lug nuts are tight.				
Drives in slow speed when elevated.				
Brakes: Machine stops when joystick released. Brakes hold the unit when on an allowable grade. Alarm sounds and machine moves freely when brakes are released. Brakes engage when power is cycled.				
Pothole guards deploy and lock when platform is elevated.				
Lift does not elevate when pothole guards are blocked.				
DATE: _____	INSPECTED BY: _____			

3.2 | PRE-DELIVERY/ANNUAL/FREQUENT INSPECTION CHECKLIST

Model: \_\_\_\_\_

Serial No. \_\_\_\_\_

- Check each item listed below
- Use proper operating, service, and maintenance manual for specific information and settings
- If an item is found to be unacceptable make the necessary repairs and check the "repaired" box
- When all items are "acceptable", the unit is ready for service



**WORK PLATFORMS SHALL BE INSPECTED, SERVICED, AND ADJUSTED TO MANUFACTURER'S REQUIREMENTS BY A QUALIFIED MECHANIC PRIOR TO EACH SALE, LEASE, OR RENTAL, AND EVERY 3 MONTHS OR 150 HOURS, WHICHEVER COMES FIRST, AND ANNUALLY.**


Y-Yes/Acceptable N-No/Unacceptable R-Repaired N/A-Not Applicable	Y	N	R	N/A
<b>BASE:</b>				
No broken welds				
Inspect slide tracks for damage				
All frame bolts tight				
Pump secure				
DC drive motors secure				
Batteries fully charged				
Tie rods secure (Pro Series)				
<b>WHEELS:</b>				
Snap rings secure				
Bolts/nuts tight				
<b>SCISSORS:</b>				
No broken welds				
No bent beam members				
All rollers turn freely				
Retaining rings secure on pivots				
Maintenance locks: Stored and securely connected				
Scissor beam tube bolts tight				
<b>PLATFORM:</b>				
No bent rails				
No broken welds				
All rails in place/secure				
110V outlet safe/working				
Entrance gate closes freely				

Y-Yes/Acceptable N-No/Unacceptable R-Repaired N/A-Not Applicable	Y	N	R	N/A
<b>DECALS:</b>				
Legible				
Correct capacity noted				
Proper placement & quantity				
<b>RAILS/EXTENDING PLATFORM:</b>				
Extends freely				
Cables in place/secure				
Locks in stowed position				
Locks in extended position				
<b>FUNCTIONS:</b>				
All functions (drive, elevate, and steer) operational (see Pre-Start Inspection for details)				
Pothole guards deploy when platform elevated				
Emergency stop breaks circuits				
Slow speed mode activates just after units pothole bars are deployed				
Pothole interlock functions correctly				
<b>BRAKES:</b>				
Operational				
<b>EMERGENCY DOWN:</b>				
Operational				
<b>WIRING:</b>				
Switches secure				
Contactor(s) secure				
Tight on terminals (No loose wiring)				
<b>OIL:</b>				
Level 1" from top (when platform stowed)				
<b>OTHER:</b>				
Check all hoses for leaks				
Check all fittings for leaks				
Battery charger secure/operational				
When tilted past the allowable degree, unit will not elevate				
Warning horn				
Hour meter operational				
Battery indication operational				
Operator's Manual is on the unit				
Overload light & alarm sounds when overloaded (Only required for annual inspection on CE Lifts)				
DATE:	INSPECTED BY:			




4.1 | HYDRAULIC SCHEMATIC

Part No. HS-112-20-501-50

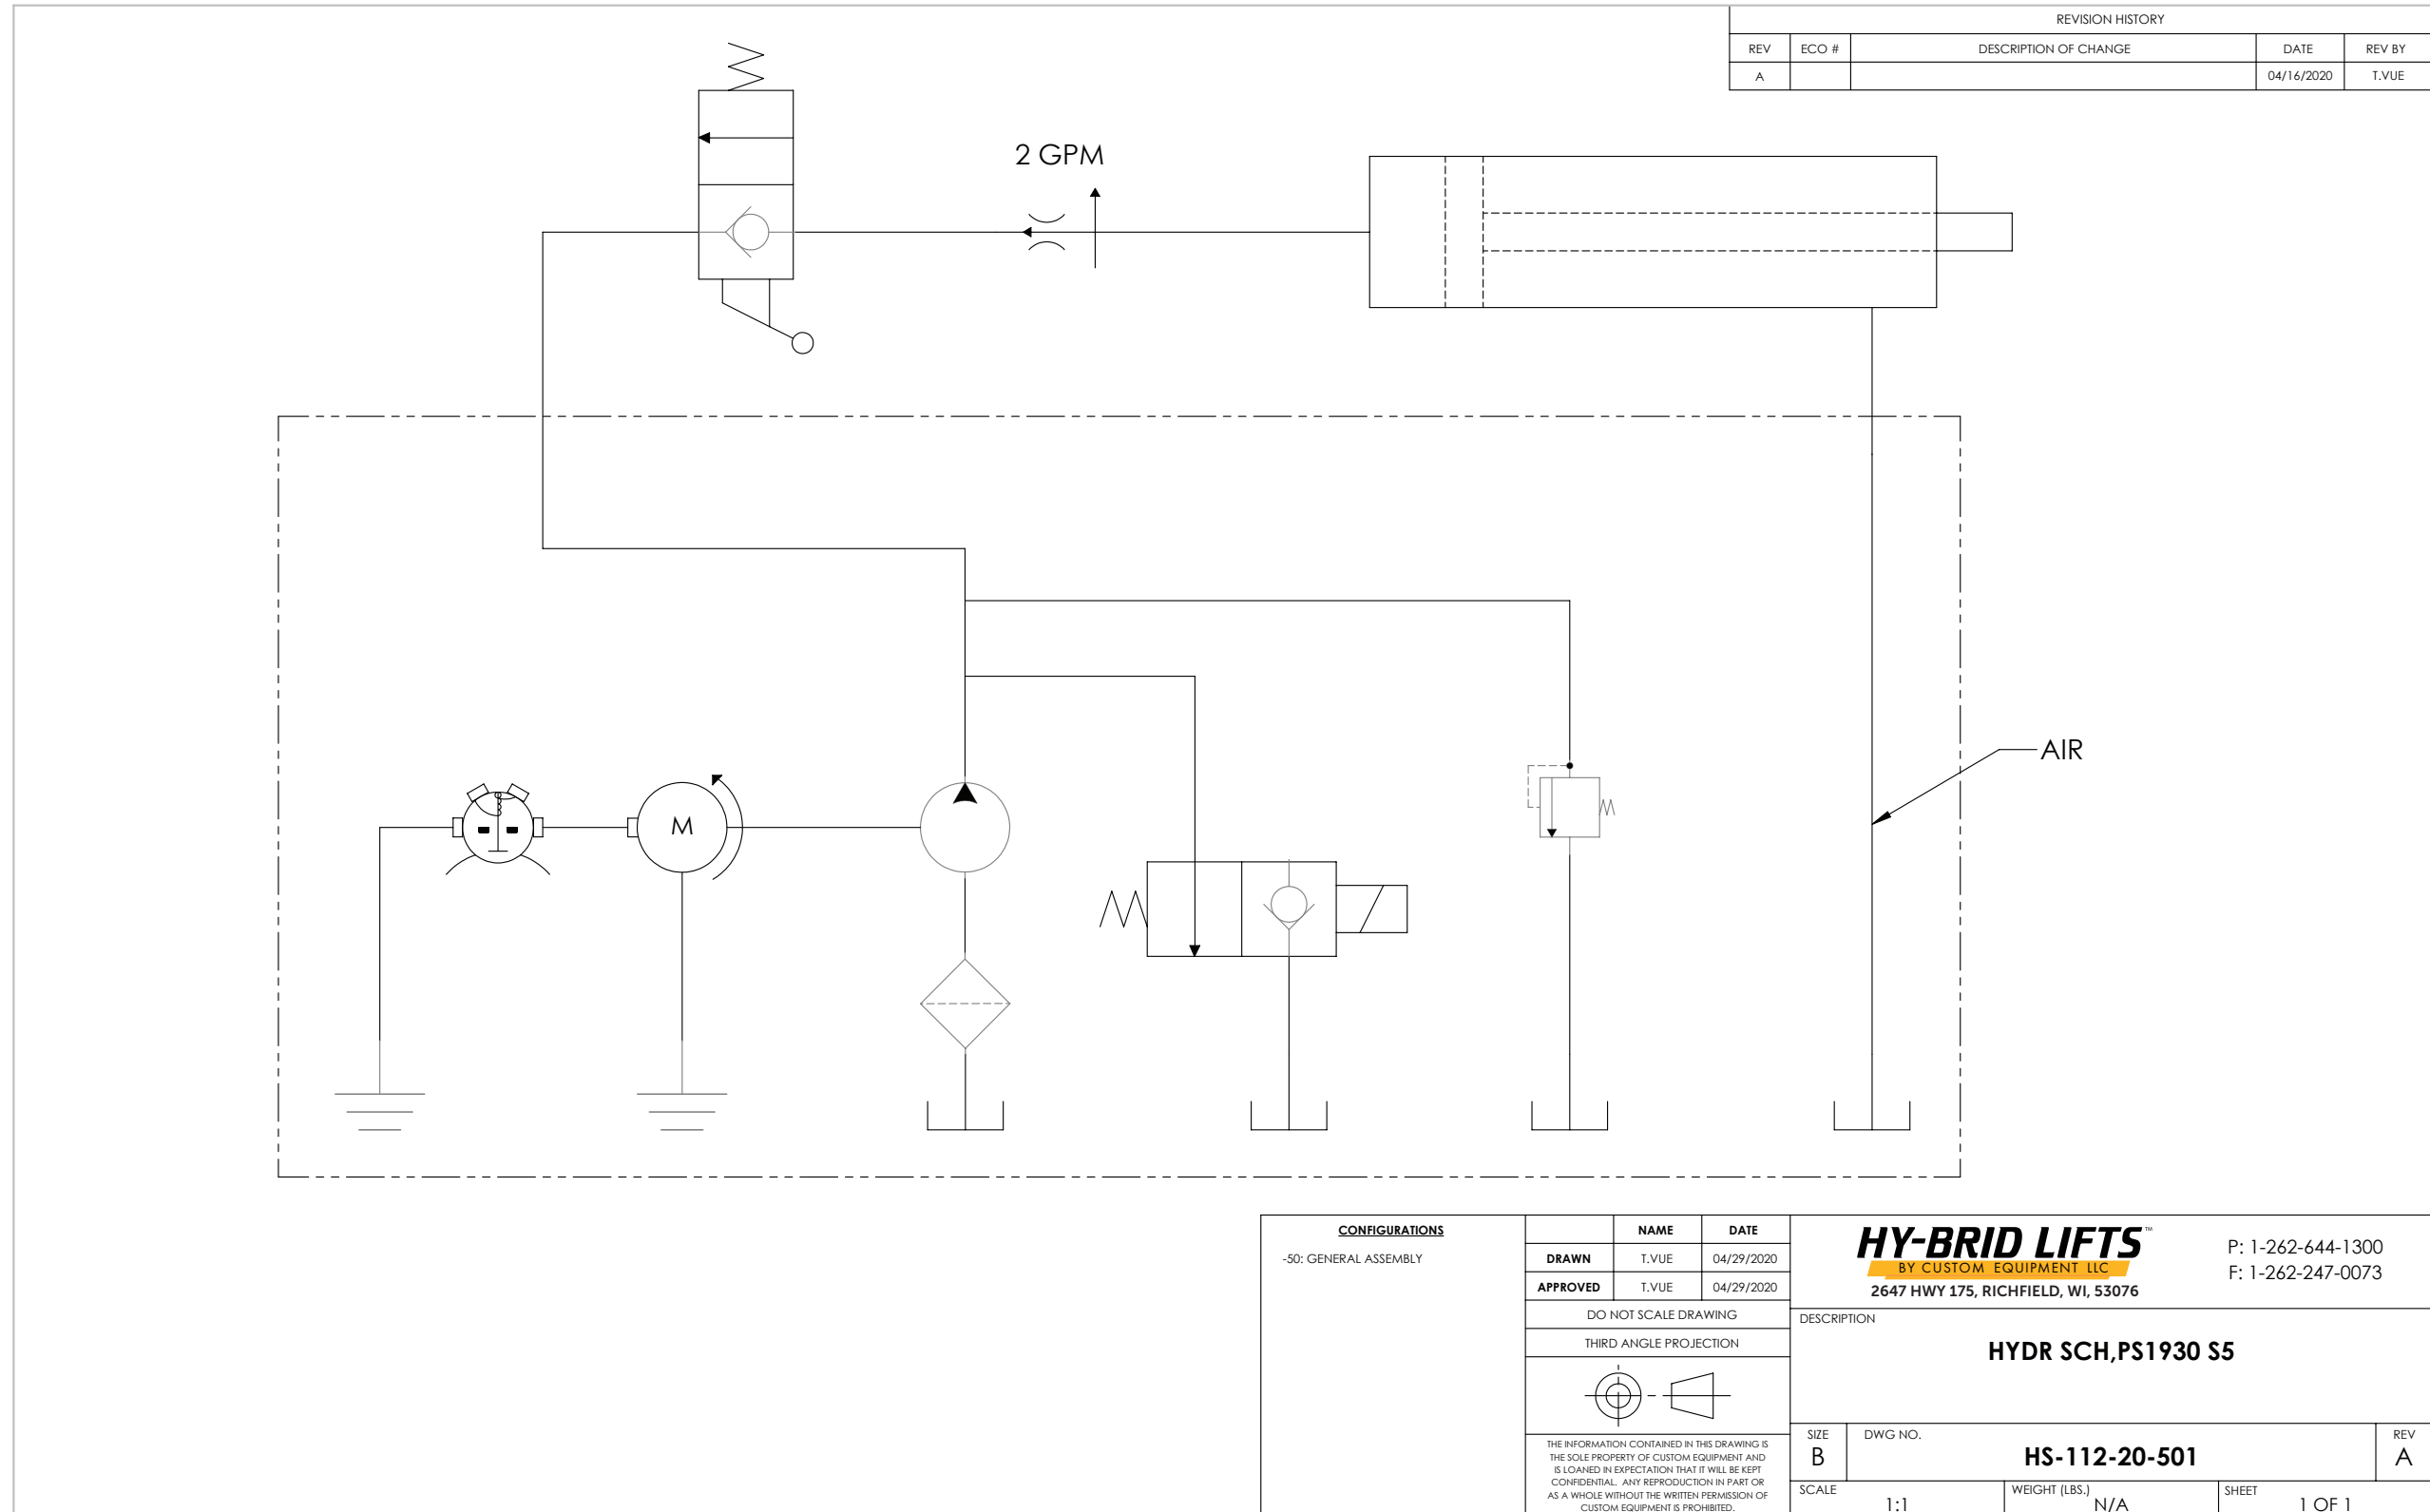


4.2 | ELECTRICAL SCHEMATIC

Part No. WS-112-20-501-50

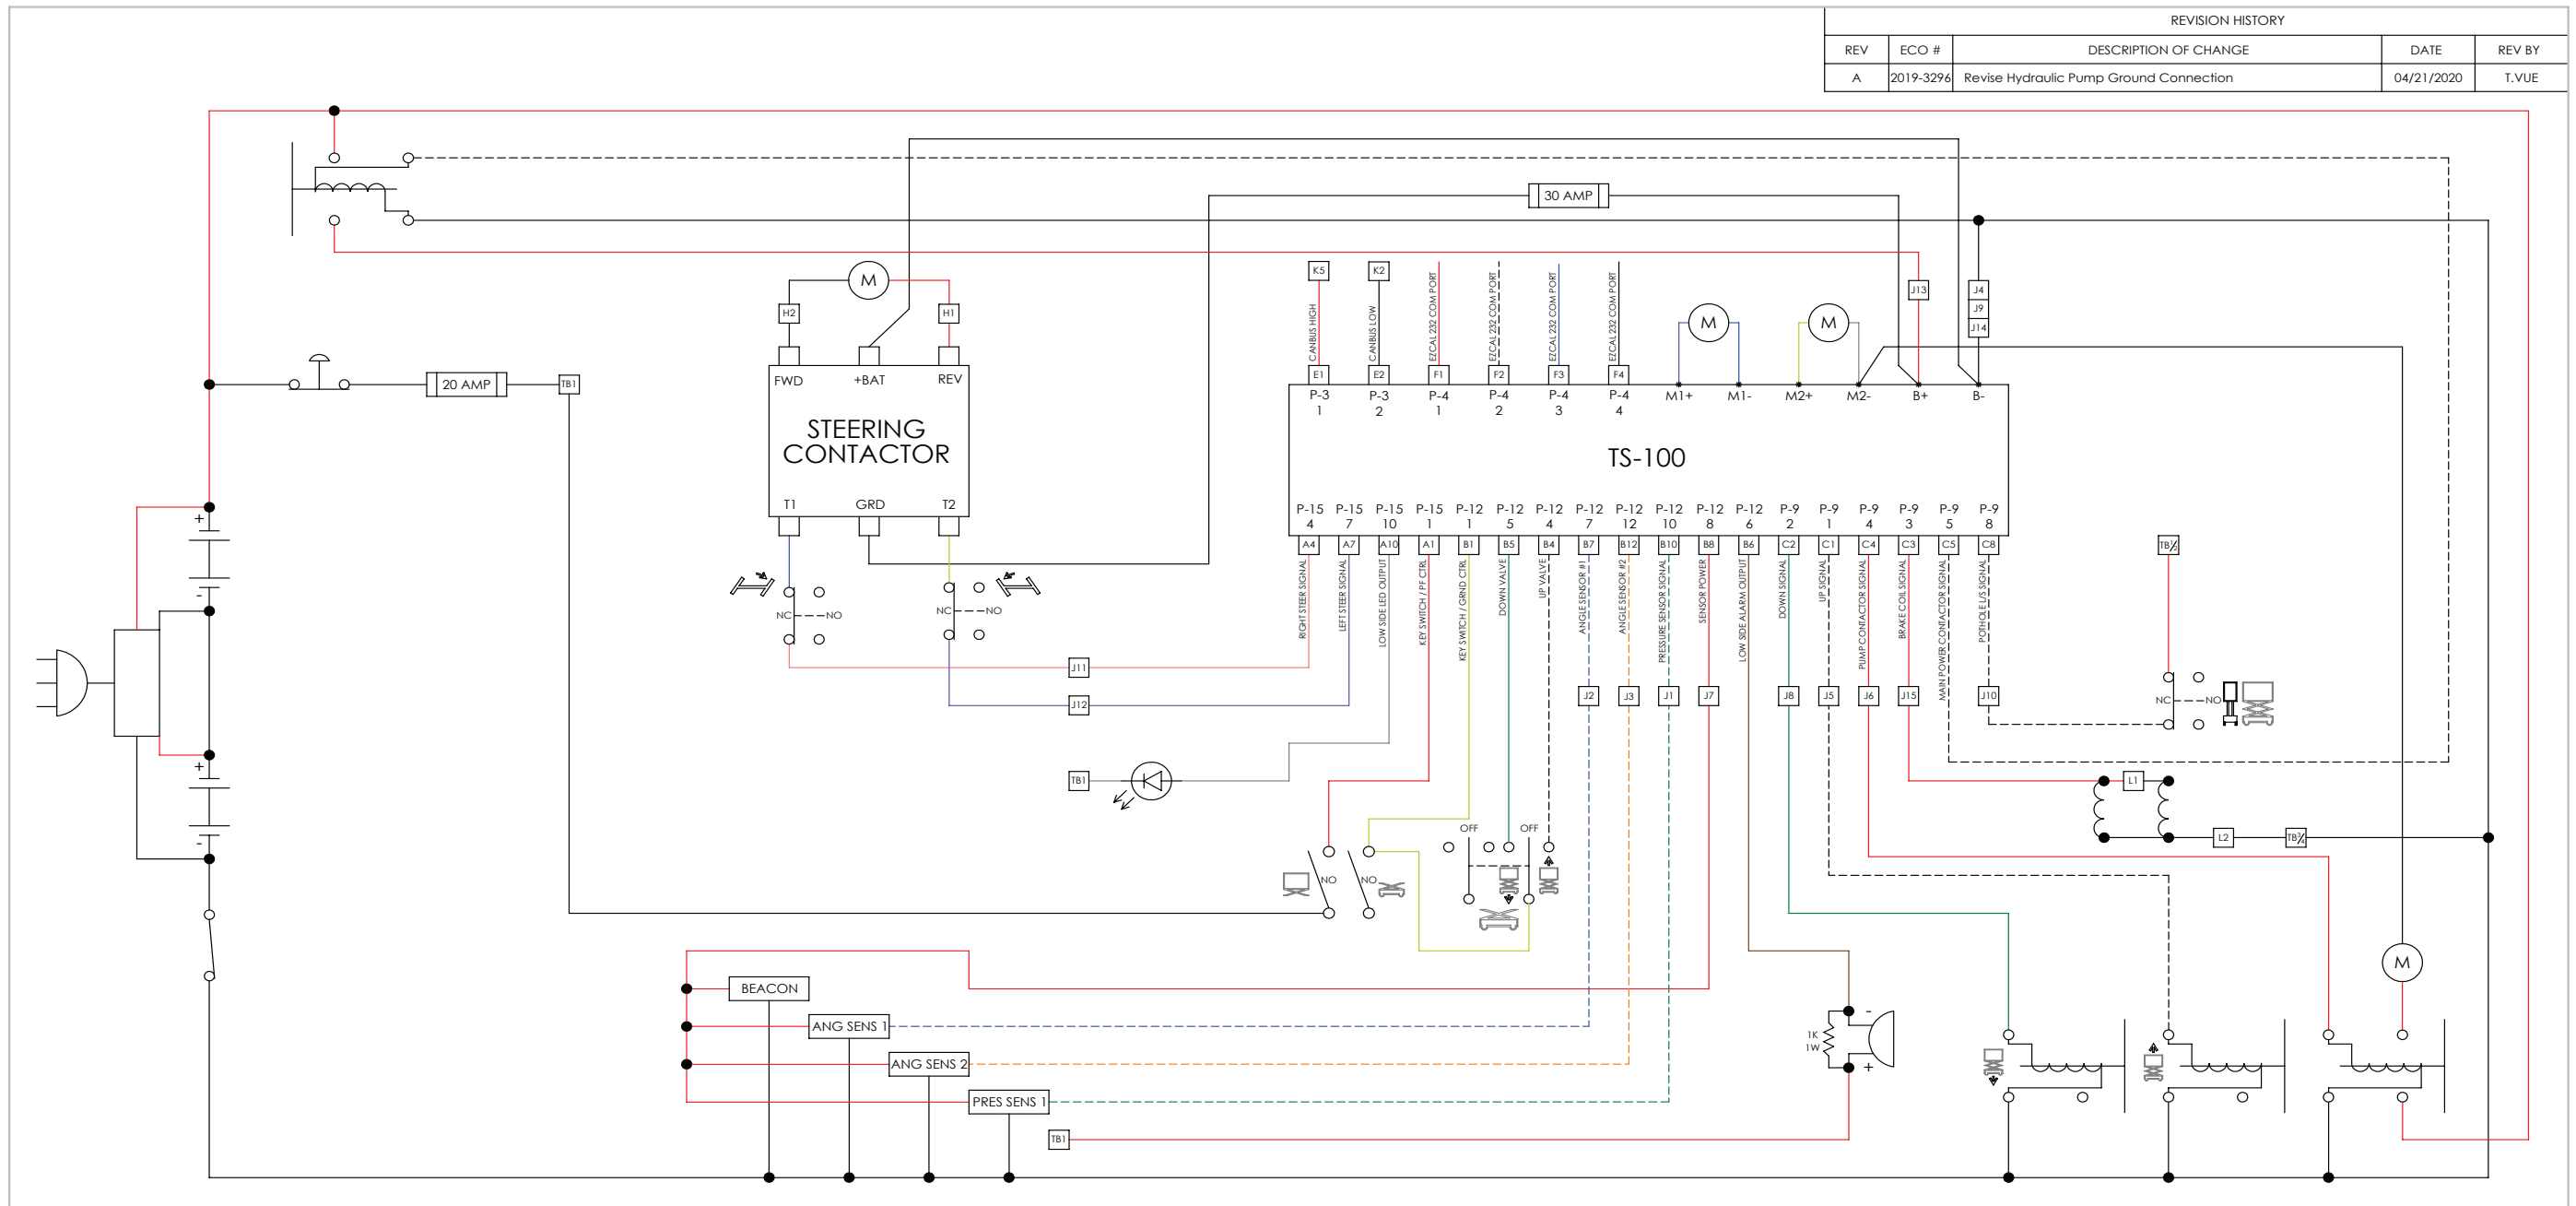

REVISION HISTORY				
REV	ECO #	DESCRIPTION OF CHANGE	DATE	REV BY
A	2019-3296	Revise Hydraulic Pump Ground Connection	04/21/2020	T.VUE

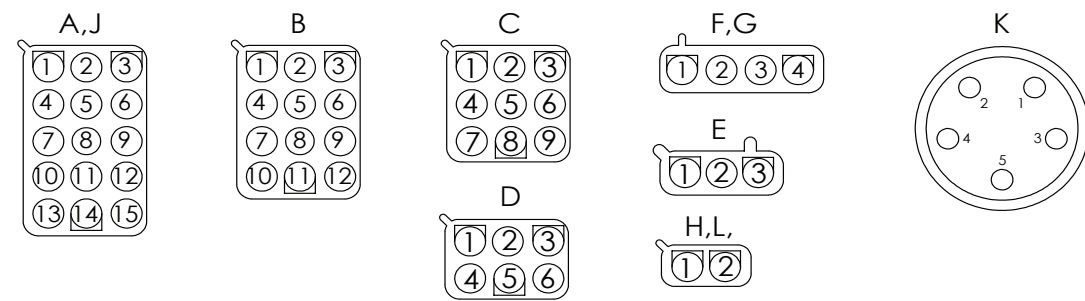

**CONFIGURATIONS**  
-50: GENERAL ASSEMBLY

	NAME	DATE
DRAWN	T.VUE	04/13/2020
APPROVED	T.VUE	04/29/2020

DO NOT SCALE DRAWING  
THIRD ANGLE PROJECTION

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM EQUIPMENT AND IS LOANED IN EXPECTATION THAT IT WILL BE KEPT CONFIDENTIAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM EQUIPMENT IS PROHIBITED.

**HY-BRID LIFTS™**  
BY CUSTOM EQUIPMENT LLC  
2647 HWY 175, RICHFIELD, WI, 53076

P: 1-262-644-1300  
F: 1-262-247-0073

DESCRIPTION  
**ELEC SCH, PRO SERIES, S5**

SIZE	DWG NO.	REV
B	<b>WS-112-20-501</b>	A

SCALE: 1:1      WEIGHT (LBS.): N/A      SHEET: 1 OF 1

### 4.3 | CONTROL BOARD DIAGNOSTIC

When using the LED for diagnosis, note that a DUAL FLASH code is indicated. The LED will flash on/off a certain number of times, pause off for a short delay, then flash on/off a second certain number of times, followed by a much longer pause off. The sequence will then repeat.

**EXAMPLE:** The LED flash code 3-2 will look like: on/off/on/off/on/off-short-delay/on/off/on/off-long-delay/repeat




FIGURE 6: LED Light Diagnostic Location

If a handheld controller (Part no: ELEC-646-5) is available, it will display error codes and their description




FIGURE 7: EZ Cal Handheld Controller

LED Code	Possible Cause
Fast Flash	Control Module is not calibrated, Do not operate unit. Unit has just been powered on. You may need to wait for initialization, then re-select function.
Steady	Ready to operate, things should be working normally. A function is selected but the enable trigger is not squeezed.
1-1	The control module is not calibrated. Do not use this unit.
2-1	The key switch selector switch indicate the mode in which the TS100 must operate. If neither input is active, or if both are active together, the TS100 does not know how to function. Check key switch and wiring to P15-1 and P12-1. A safety feature is locking functions or a switch has failed. Check that platform is not overloaded, operating on a level surface, and pothole guards deploy.
2-2	Check that joystick is neutral when powered on. Check that joystick trigger is not closed for too long without selecting a function. Check for failed joystick, selector switches, and up/down switches.
3-x	There is a problem with the drive contactor or valve wiring, or with the motor power wiring; disconnect connector P9 to see if the problem is caused by drive contactor or valve wiring (if the fault clears, check for an illegal B+ supply in to P9) Check motor power wiring; with the drive contactor open the B+ power terminals should be at 10V-15V (significantly lower than B+) If the LED is steady at power-on, and the fault (3-5) occurs after a delay when attempting to drive or lift, the motor may be stalled and causing an overload of the TS100 or there is a power wiring error like connecting the B+ cable to a motor stud

LED Code	Possible Cause
3-2	Check P9 wiring. One or more signals showing outputs when all should be off.
3-3	Check B+ stud connections on controller. Voltage is too high.
3-4	There is voltage on safe pre-valve supply when there should not be. Controller may need to be replaced.
3-5	The drive brake current is too high. Motor overload. Check for a seized motor or for power wiring to motors. There is a problem with battery supply, the height and/or pressure sensors, the supply to them, or the temperature sensor inside the TS100
4-x	Check battery supply to EMS inputs P15-1 or P12-1 (relative to the B- stud); the battery supply should be between 15V and 32V Check the output from height sensor (P12-12)
4-2	Functions Locked: Board is overheated. Check pump, drive motor wiring. Problem with controller internal voltage. Controller may need to be replaced.
4-3	Problem with controller internal voltage. Controller may need to be replaced. Battery supply is too low or too high.
4-4	Make sure batteries are fully charged. Do not operate while charging.
4-5	Joystick signal problem. Wiring problem-check for short circuits, misconnection, check P15-12 connection.
6-x	There is a problem with the height measurements, or the elevation switch disagrees with the height sensor. Check that the output from height sensor (P12-12) is in range (between 0.5V and 4.5V)
6-1	Problem with angle sensor or its connections
6-2	Problem with pressure sensor or its connections
6-3	Problem with elevation switch or its connections
6-6	Problem with CANbus wiring and/or connections
7-x	There is a problem with the power wiring – the voltage on the B+ stud is too low Check for a short-circuit to the B+ stud
7-1	Motor A current too high.
7-2	Motor A current too low.
7-3	Motor B current too high.
7-4	Motor B current too low.
7-5	Check drive connections at both drives--short or multiple wiring faults.
7-7	Check B+ stud connections on controller. Voltage is too low.

5.1 | WIRING DIAGRAM

Part No. WD-112-20-501-50

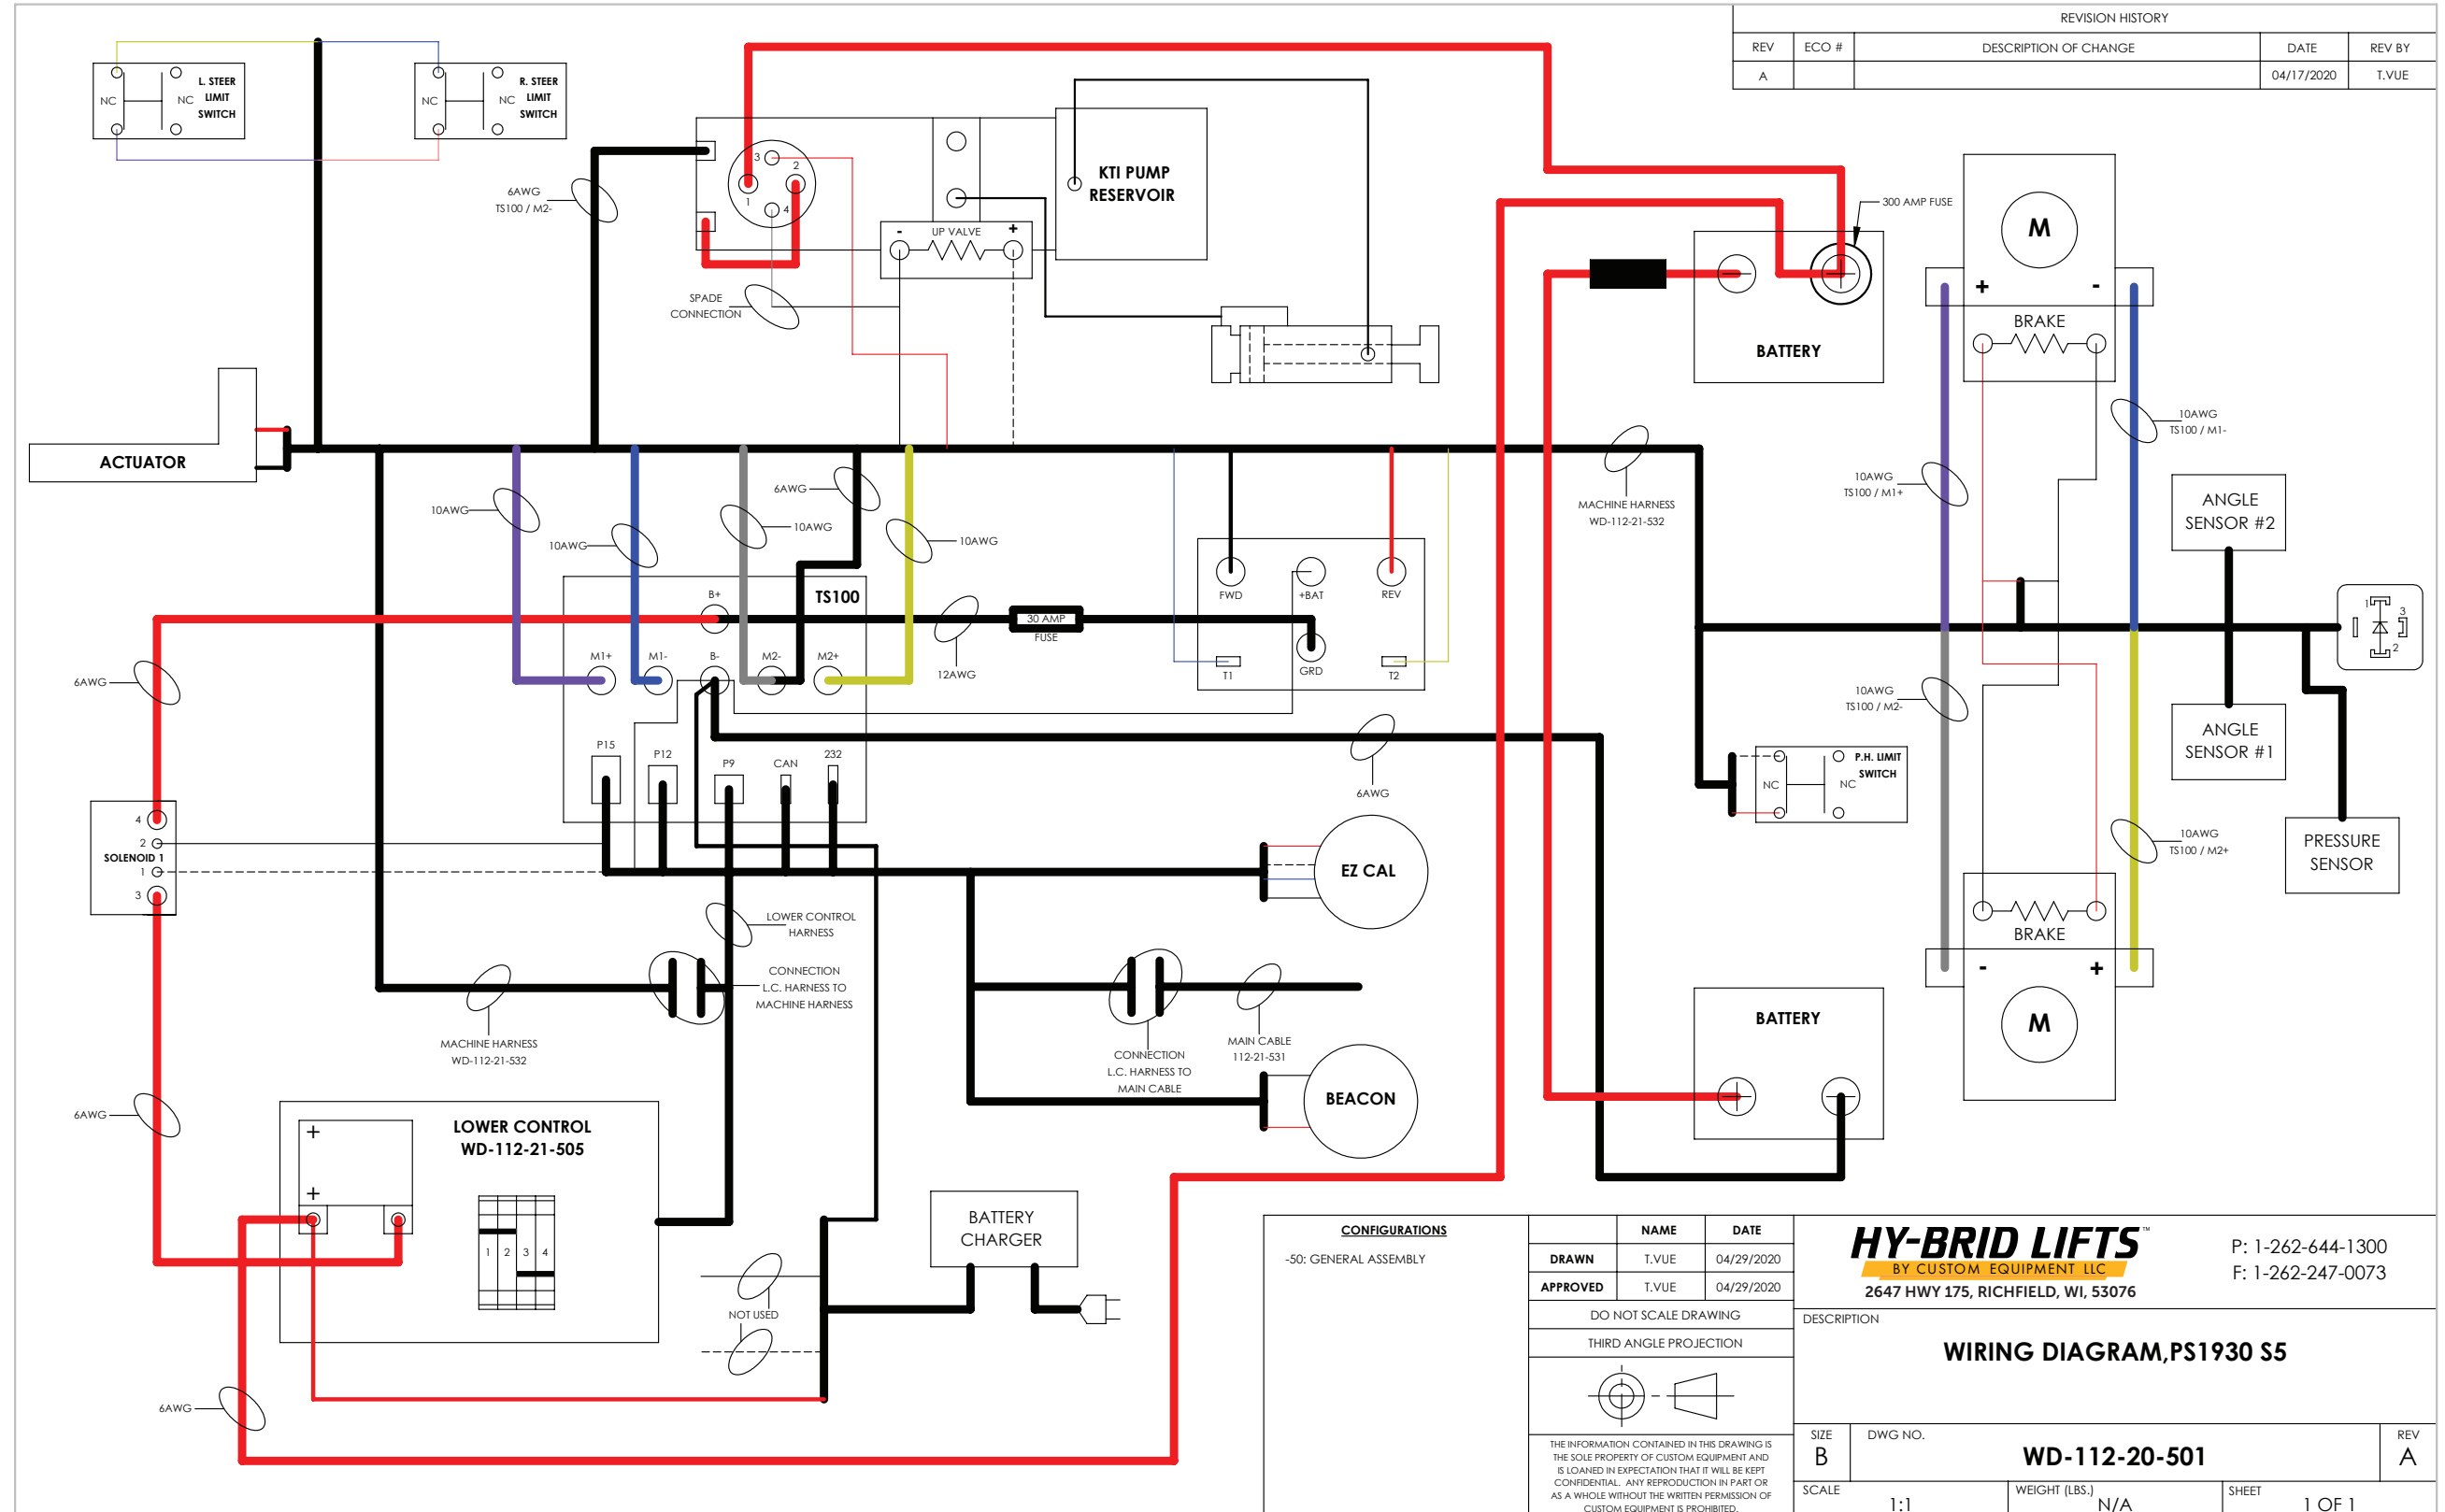


REVISION HISTORY				
REV	ECO #	DESCRIPTION OF CHANGE	DATE	REV BY
A			04/17/2020	T.VUE



<b>CONFIGURATIONS</b>		<b>NAME</b>		<b>DATE</b>	
-50: GENERAL ASSEMBLY		T.VUE		04/29/2020	
		T.VUE		04/29/2020	
DO NOT SCALE DRAWING					
THIRD ANGLE PROJECTION					
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM EQUIPMENT AND IS LOANED IN EXPECTATION THAT IT WILL BE KEPT CONFIDENTIAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM EQUIPMENT IS PROHIBITED.</small>					
		<b>HY-BRID LIFTS™</b> BY CUSTOM EQUIPMENT LLC 2647 HWY 175, RICHFIELD, WI, 53076		P: 1-262-644-1300 F: 1-262-247-0073	
<b>WIRING DIAGRAM, PS1930 S5</b>					
SIZE	DWG. NO.				REV
B	WD-112-20-501				A
SCALE	1:1	WEIGHT (LBS.)	N/A	SHEET	1 OF 1

5.2 | MACHINE HARNESS WIRING DIAGRAM

Part No. WD-112-20-532-50

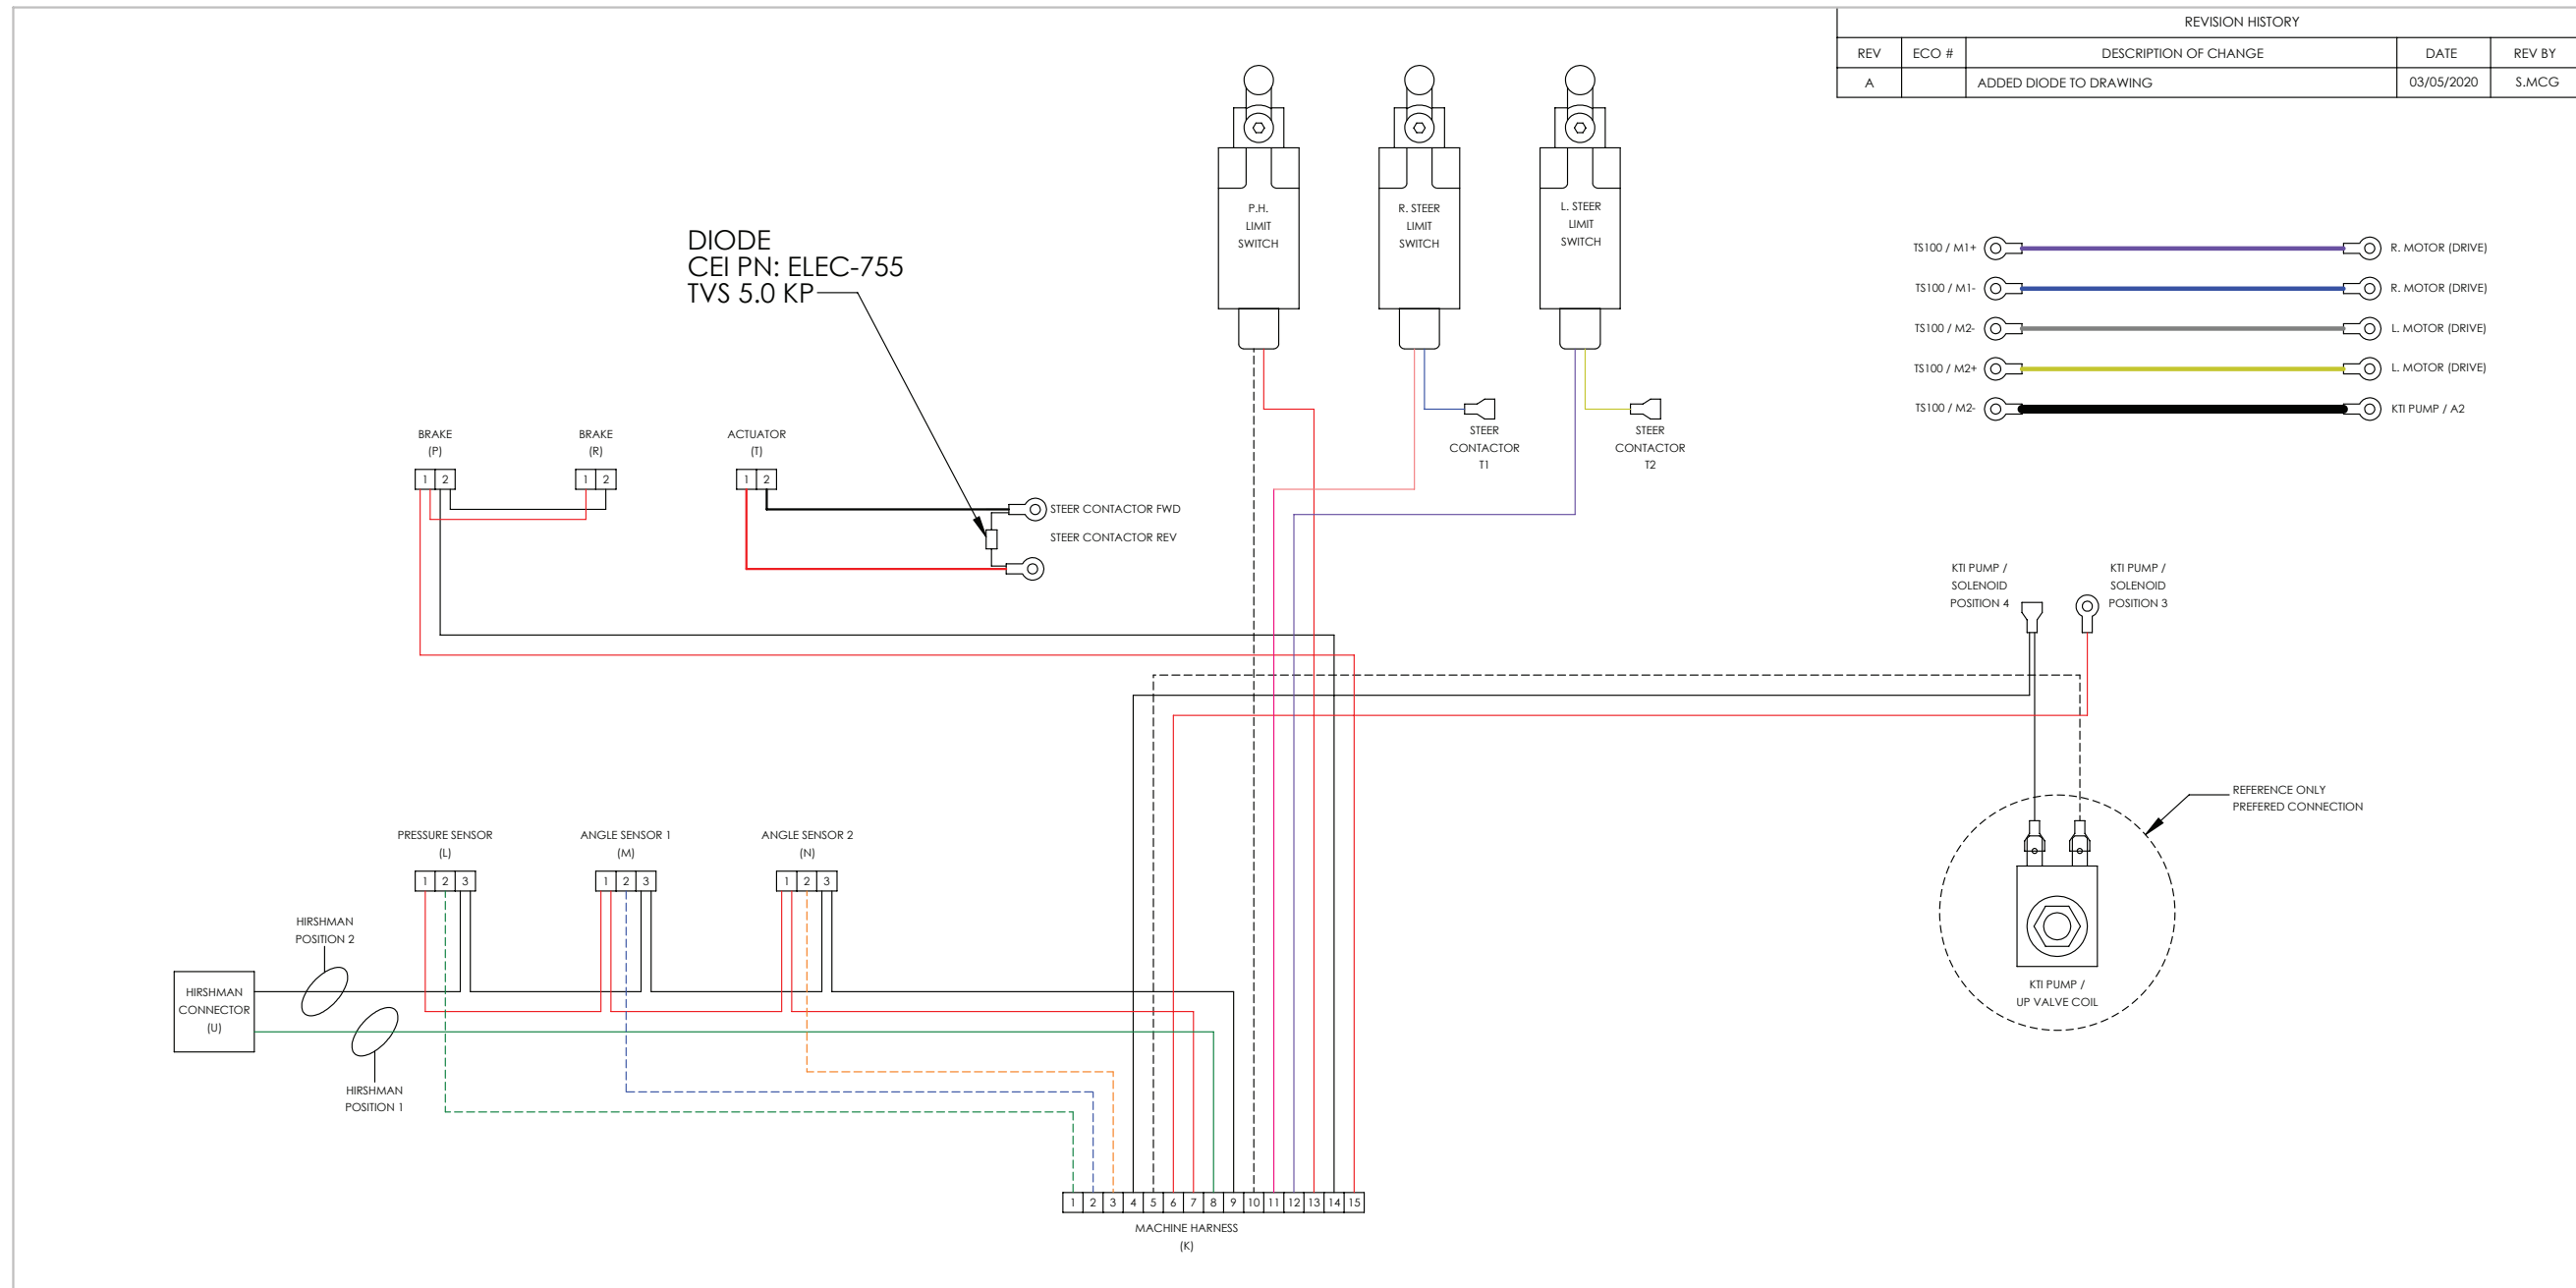


REVISION HISTORY				
REV	ECO #	DESCRIPTION OF CHANGE	DATE	REV BY
A		ADDED DIODE TO DRAWING	03/05/2020	S.MCG

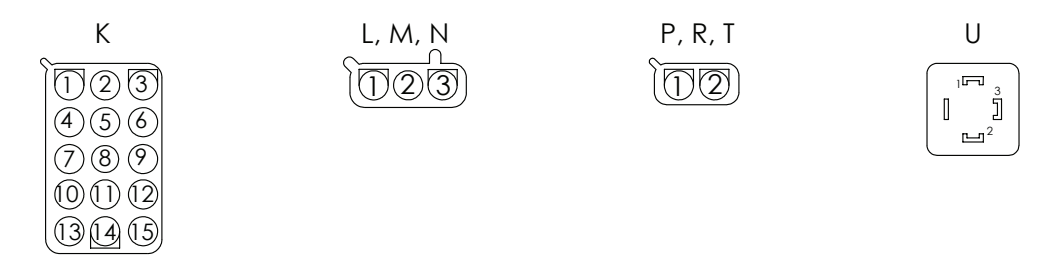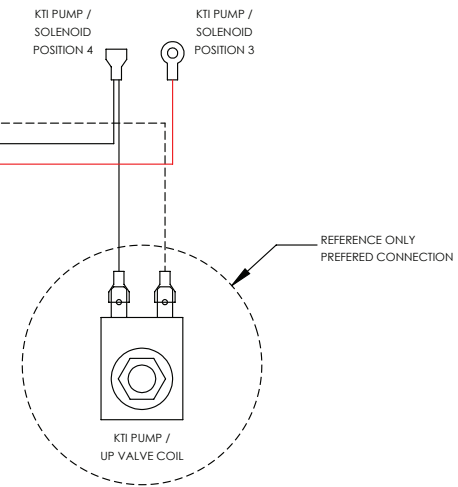

**CONFIGURATIONS**  
-50: General Assembly

	NAME	DATE
<b>DRAWN</b>	T.VUE	02/24/2020
<b>APPROVED</b>	S.MCG	04/06/2020



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM EQUIPMENT AND IS LOANED IN EXPECTATION THAT IT WILL BE KEPT CONFIDENTIAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM EQUIPMENT IS PROHIBITED.

**HY-BRID LIFTS™**  
BY CUSTOM EQUIPMENT LLC  
2647 HWY 175, RICHFIELD, WI, 53076



P: 1-262-644-1300  
F: 1-262-247-0073


DESCRIPTION  
**WD, MACHINE HARNESS PS S5**

SIZE <b>B</b>	DWG NO. <b>WD-112-21-532</b>	REV <b>A</b>
SCALE 1:1	WEIGHT (LBS.) N/A	SHEET 1 OF 1

5.3 | LOWER CONTROL WIRING DIAGRAM




Part No. WD-112-21-505-50

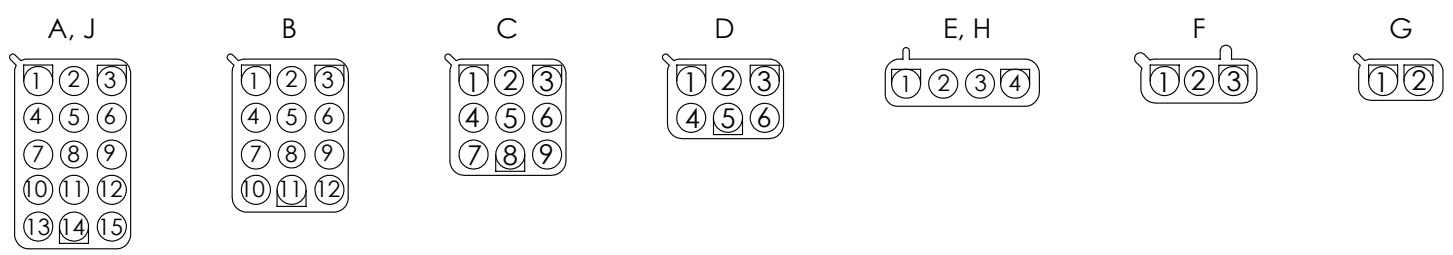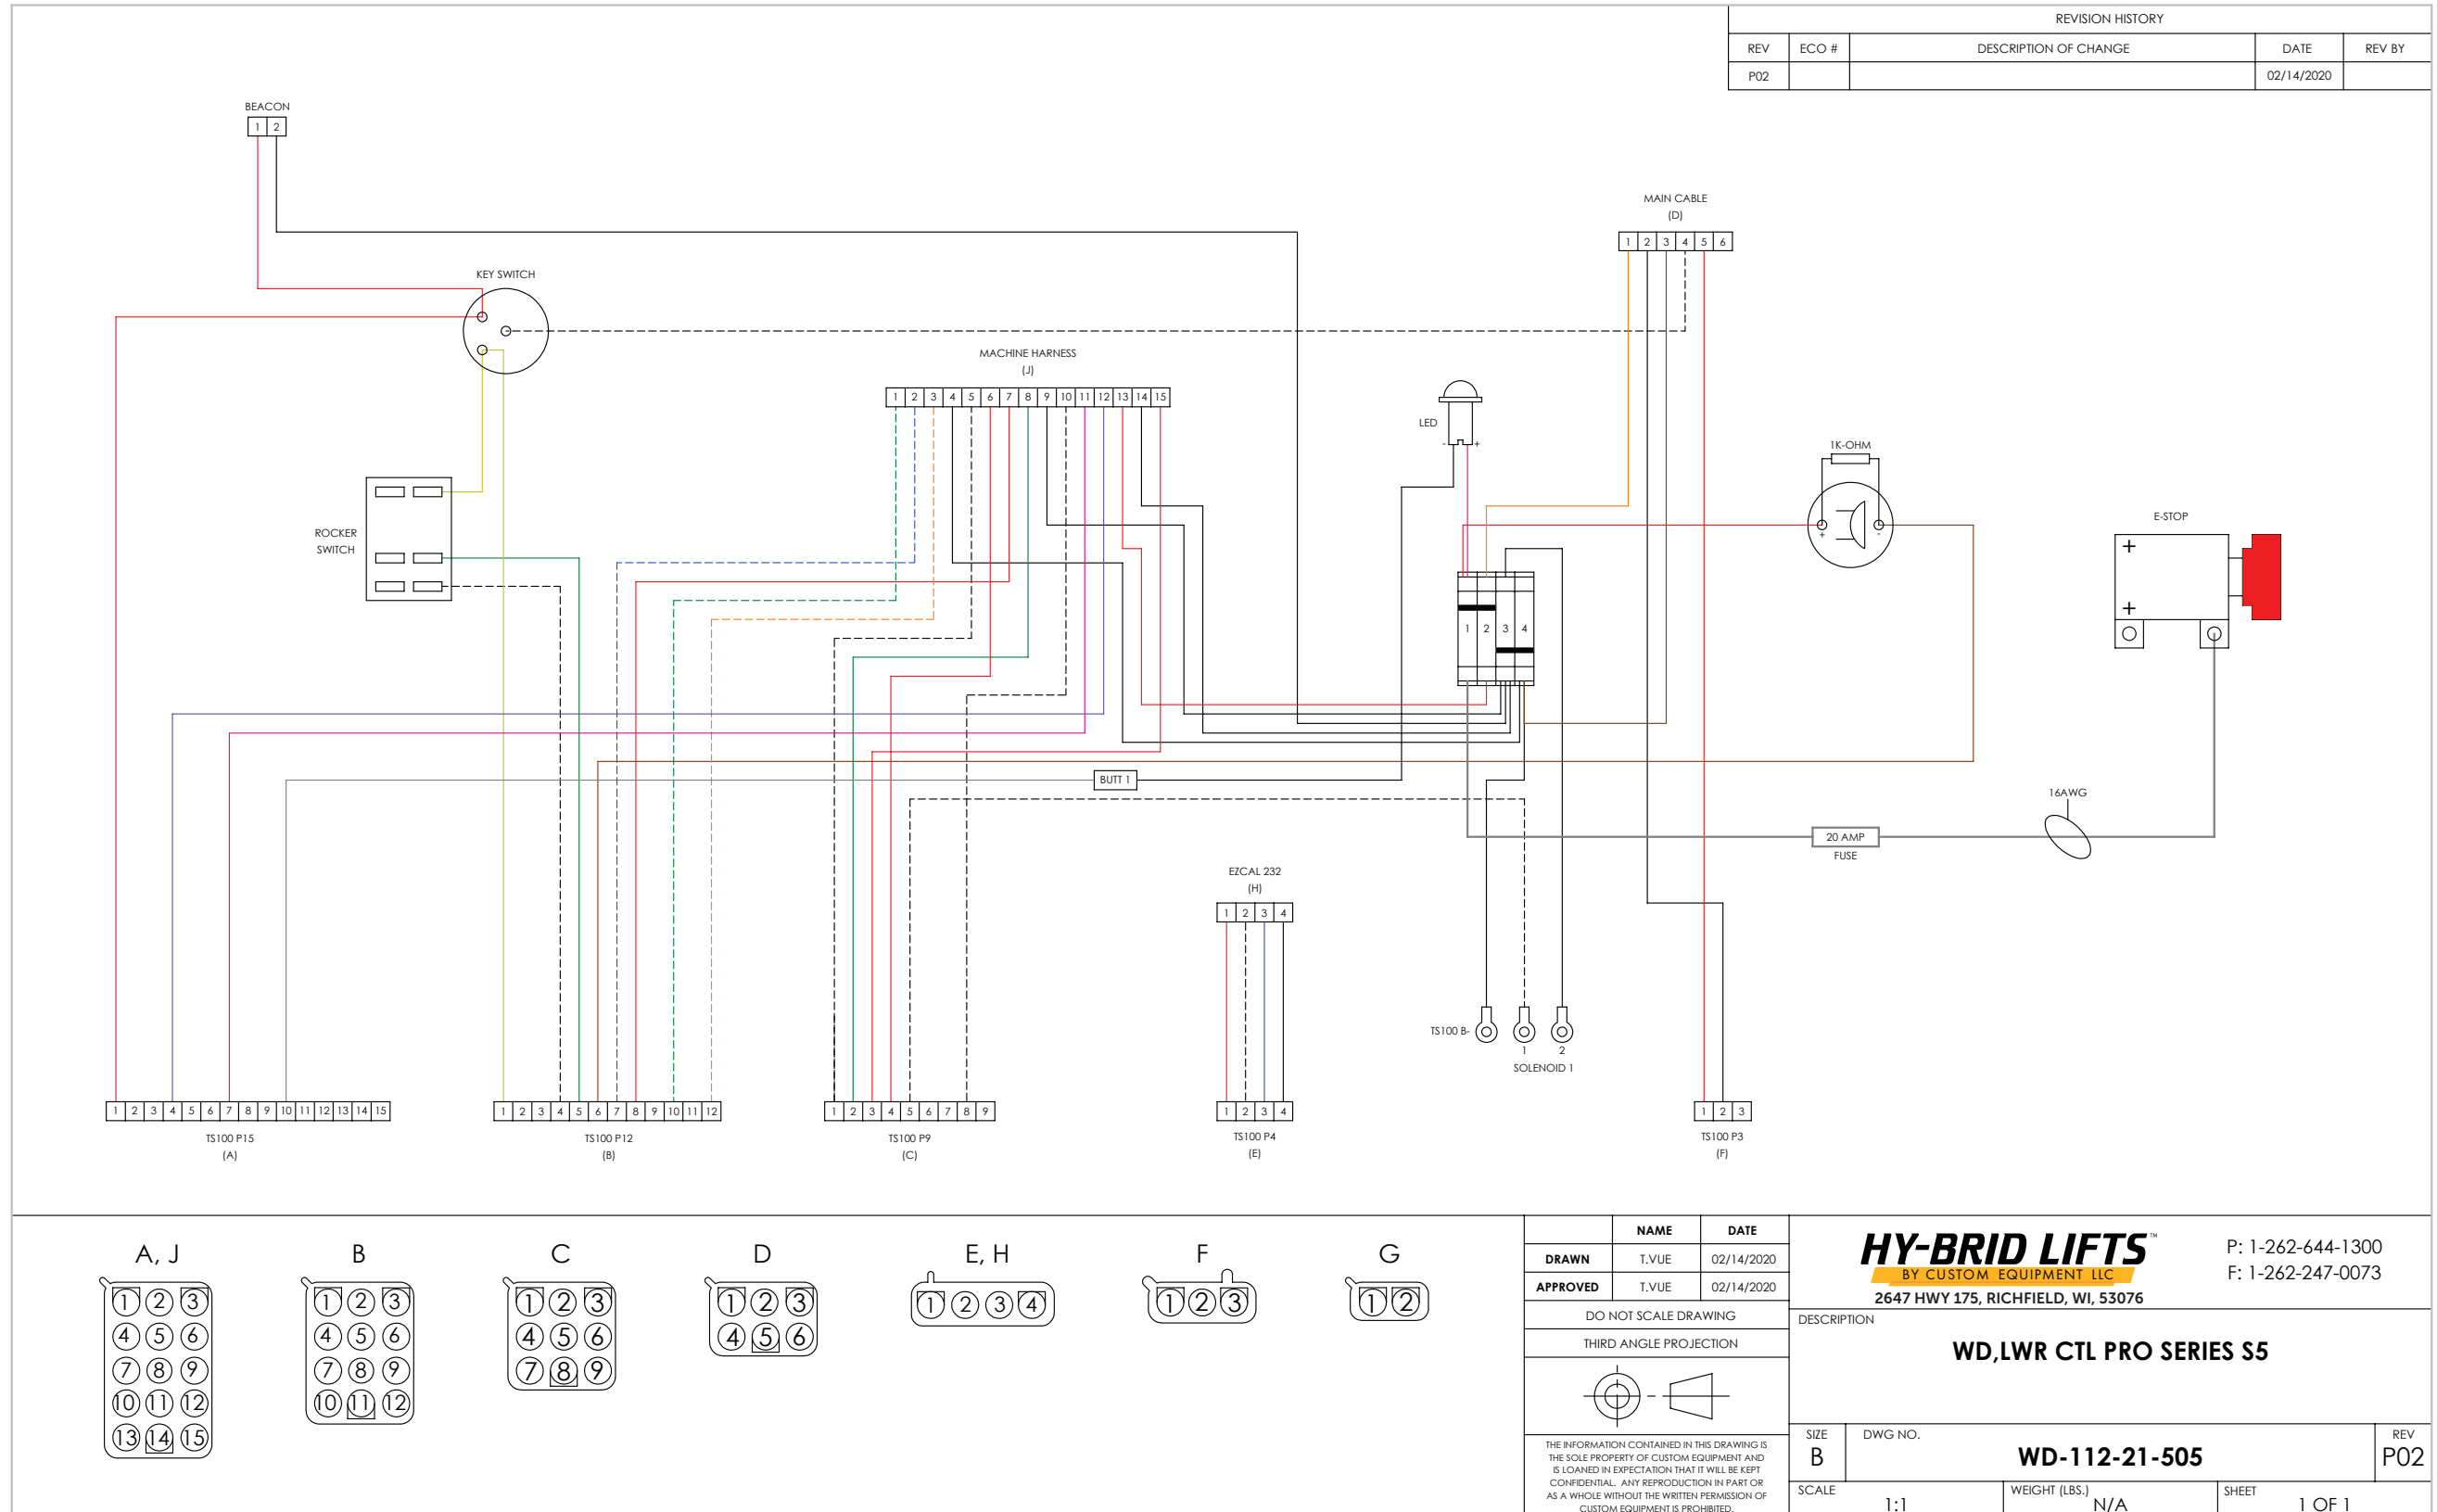

NAME	DATE			
DRAWN T.VUE	02/14/2020	<b>HY-BRID LIFTS™</b> BY CUSTOM EQUIPMENT LLC 2647 HWY 175, RICHFIELD, WI, 53076 P: 1-262-644-1300 F: 1-262-247-0073		
APPROVED T.VUE	02/14/2020			
DO NOT SCALE DRAWING		DESCRIPTION		
THIRD ANGLE PROJECTION		<b>WD,LWR CTL PRO SERIES S5</b>		
				
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM EQUIPMENT AND IS LOANED IN EXPECTATION THAT IT WILL BE KEPT CONFIDENTIAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM EQUIPMENT IS PROHIBITED.</small>		SIZE B	DWG NO. <b>WD-112-21-505</b>	REV P02
SCALE 1:1	WEIGHT (LBS.) N/A	SHEET 1 OF 1		

5.4 | UPPER CONTROL WIRING DIAGRAM

Part No. WD-112-21-506-50

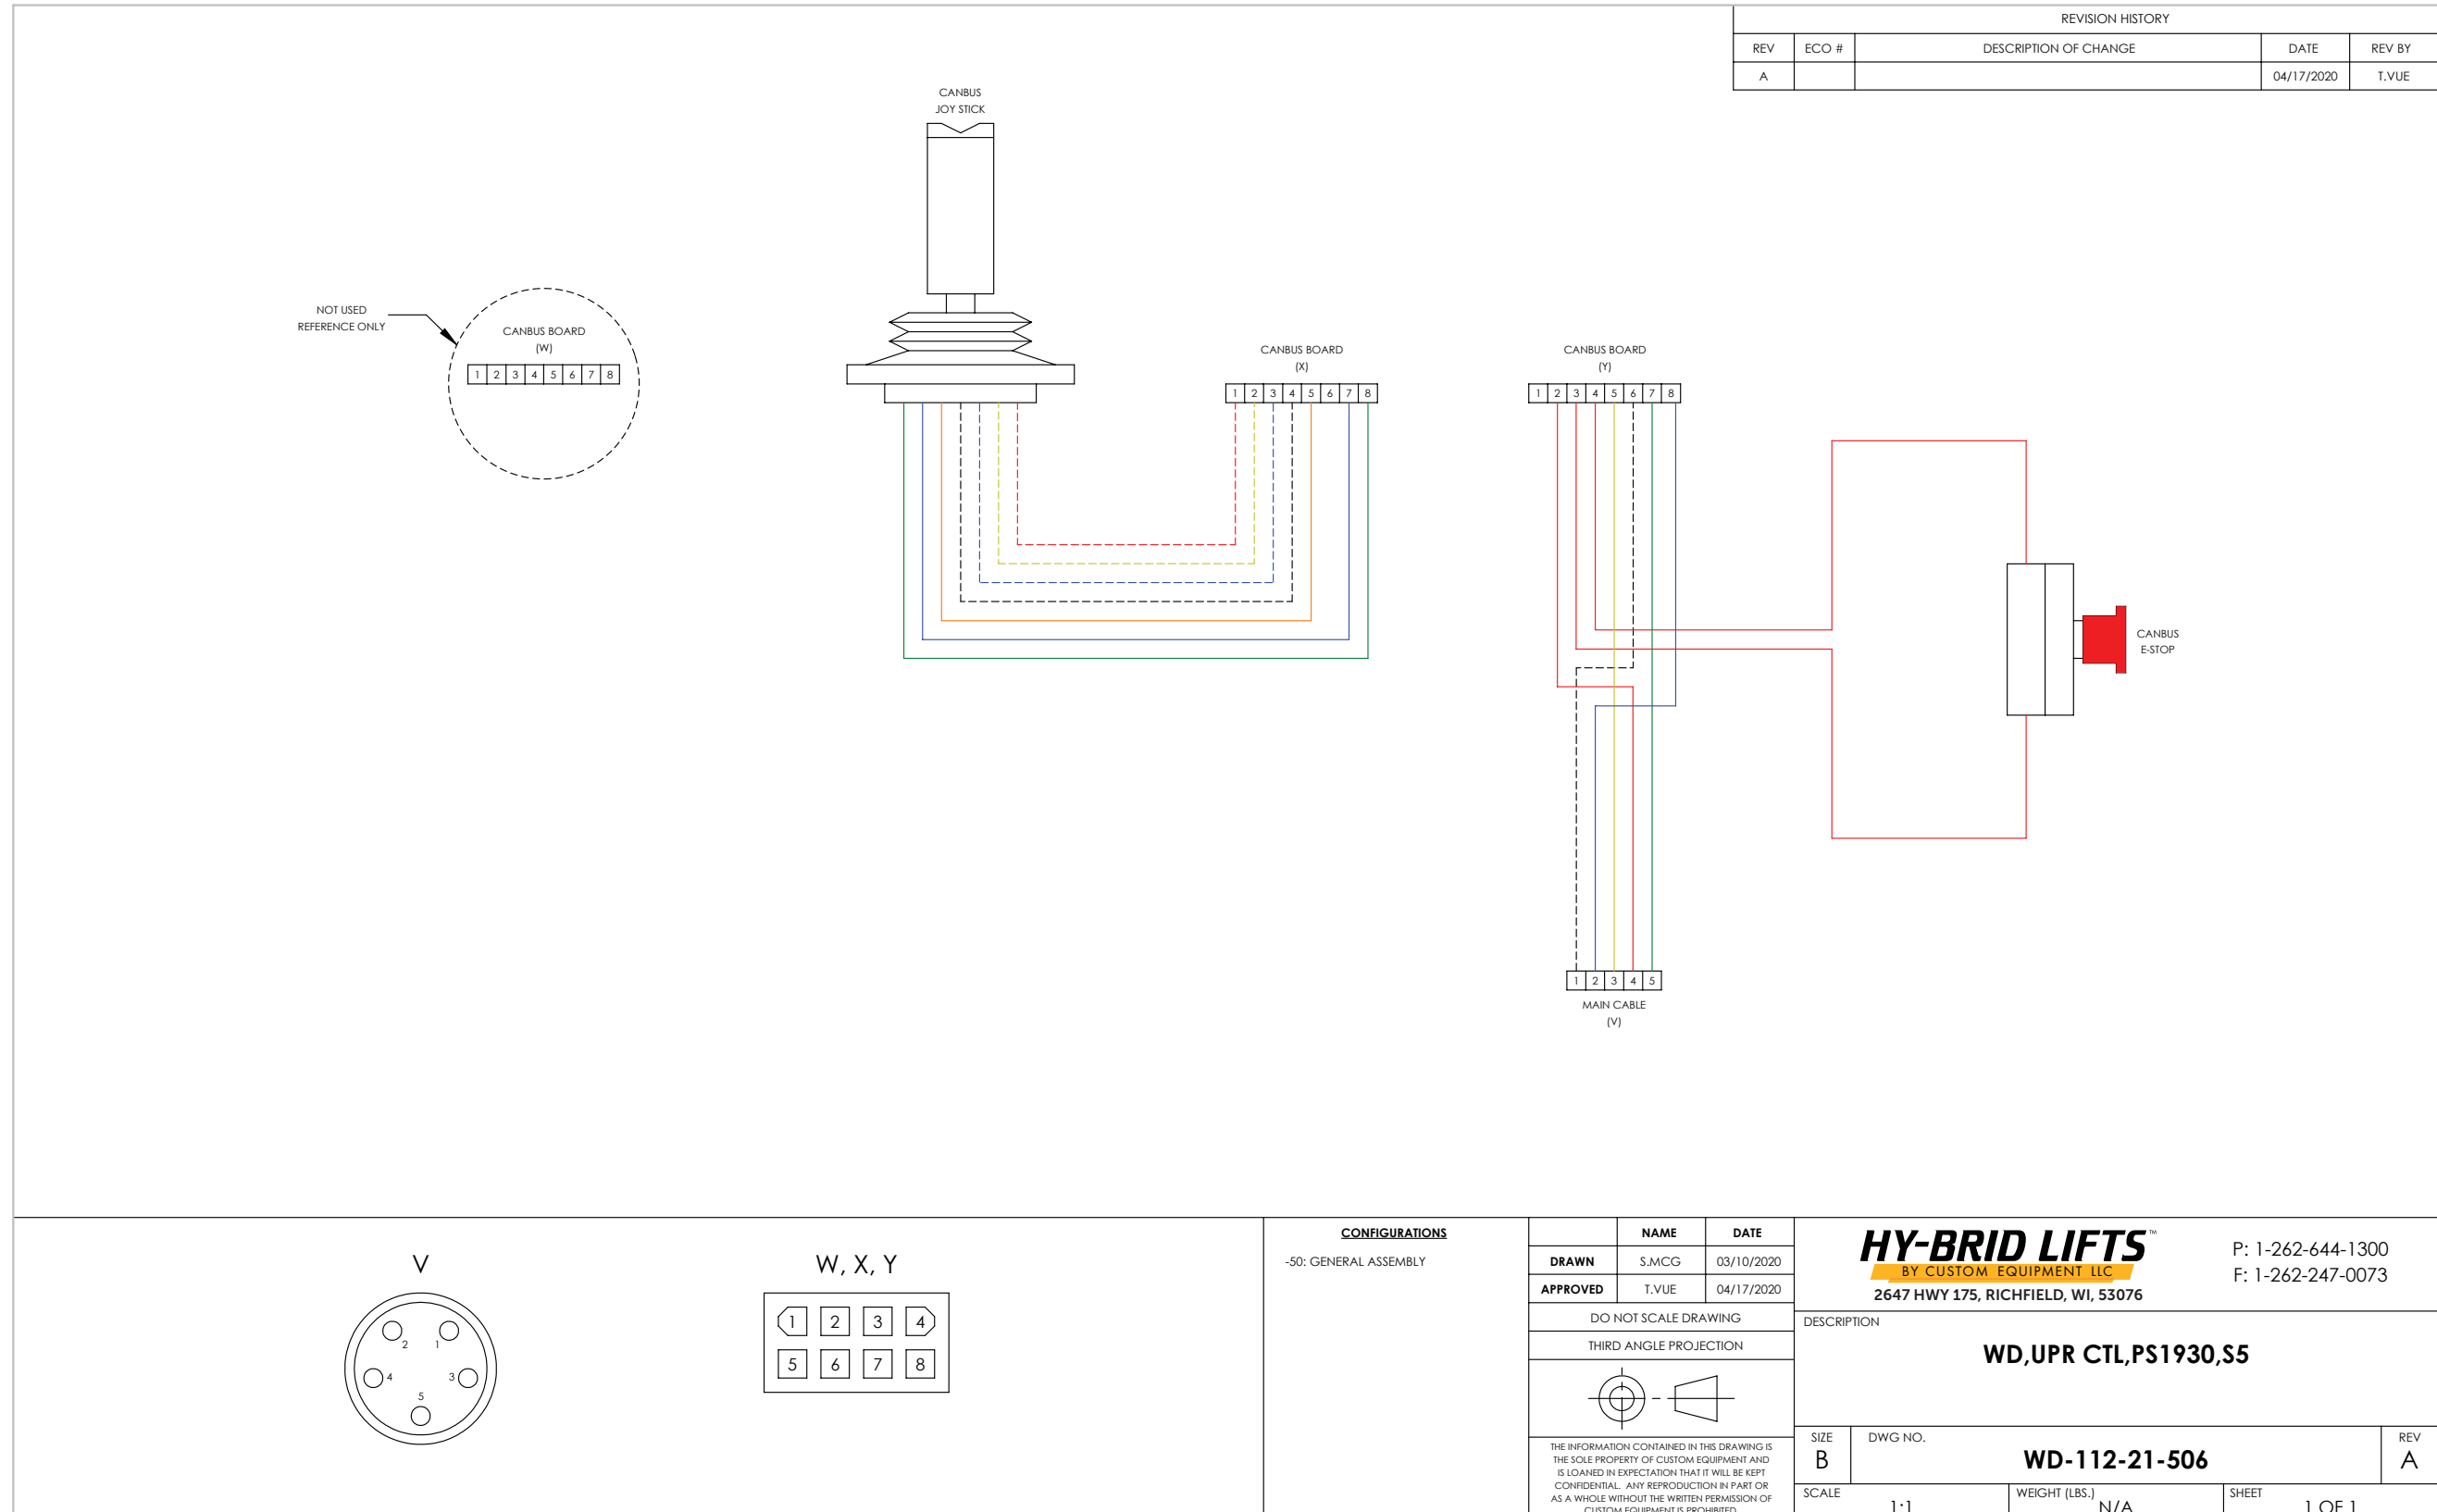


CONFIGURATIONS		
-50: GENERAL ASSEMBLY		
	NAME	DATE
DRAWN	S.MCG	03/10/2020
APPROVED	T.VUE	04/17/2020
DO NOT SCALE DRAWING		
THIRD ANGLE PROJECTION		
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CUSTOM EQUIPMENT AND IS LOANED IN EXPECTATION THAT IT WILL BE KEPT CONFIDENTIAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CUSTOM EQUIPMENT IS PROHIBITED.</small>		

<b>HY-BRID LIFTS™</b>		P: 1-262-644-1300
BY CUSTOM EQUIPMENT LLC		F: 1-262-247-0073
2647 HWY 175, RICHFIELD, WI, 53076		
DESCRIPTION		
<b>WD,UPR CTL,PS1930,S5</b>		
SIZE	DWG NO.	REV
B	<b>WD-112-21-506</b>	A
SCALE	WEIGHT (LBS.)	SHEET
1:1	N/A	1 OF 1

6.1 | MAIN POWER/SAFETY CIRCUIT


Troubleshooting Step 1: Main Power

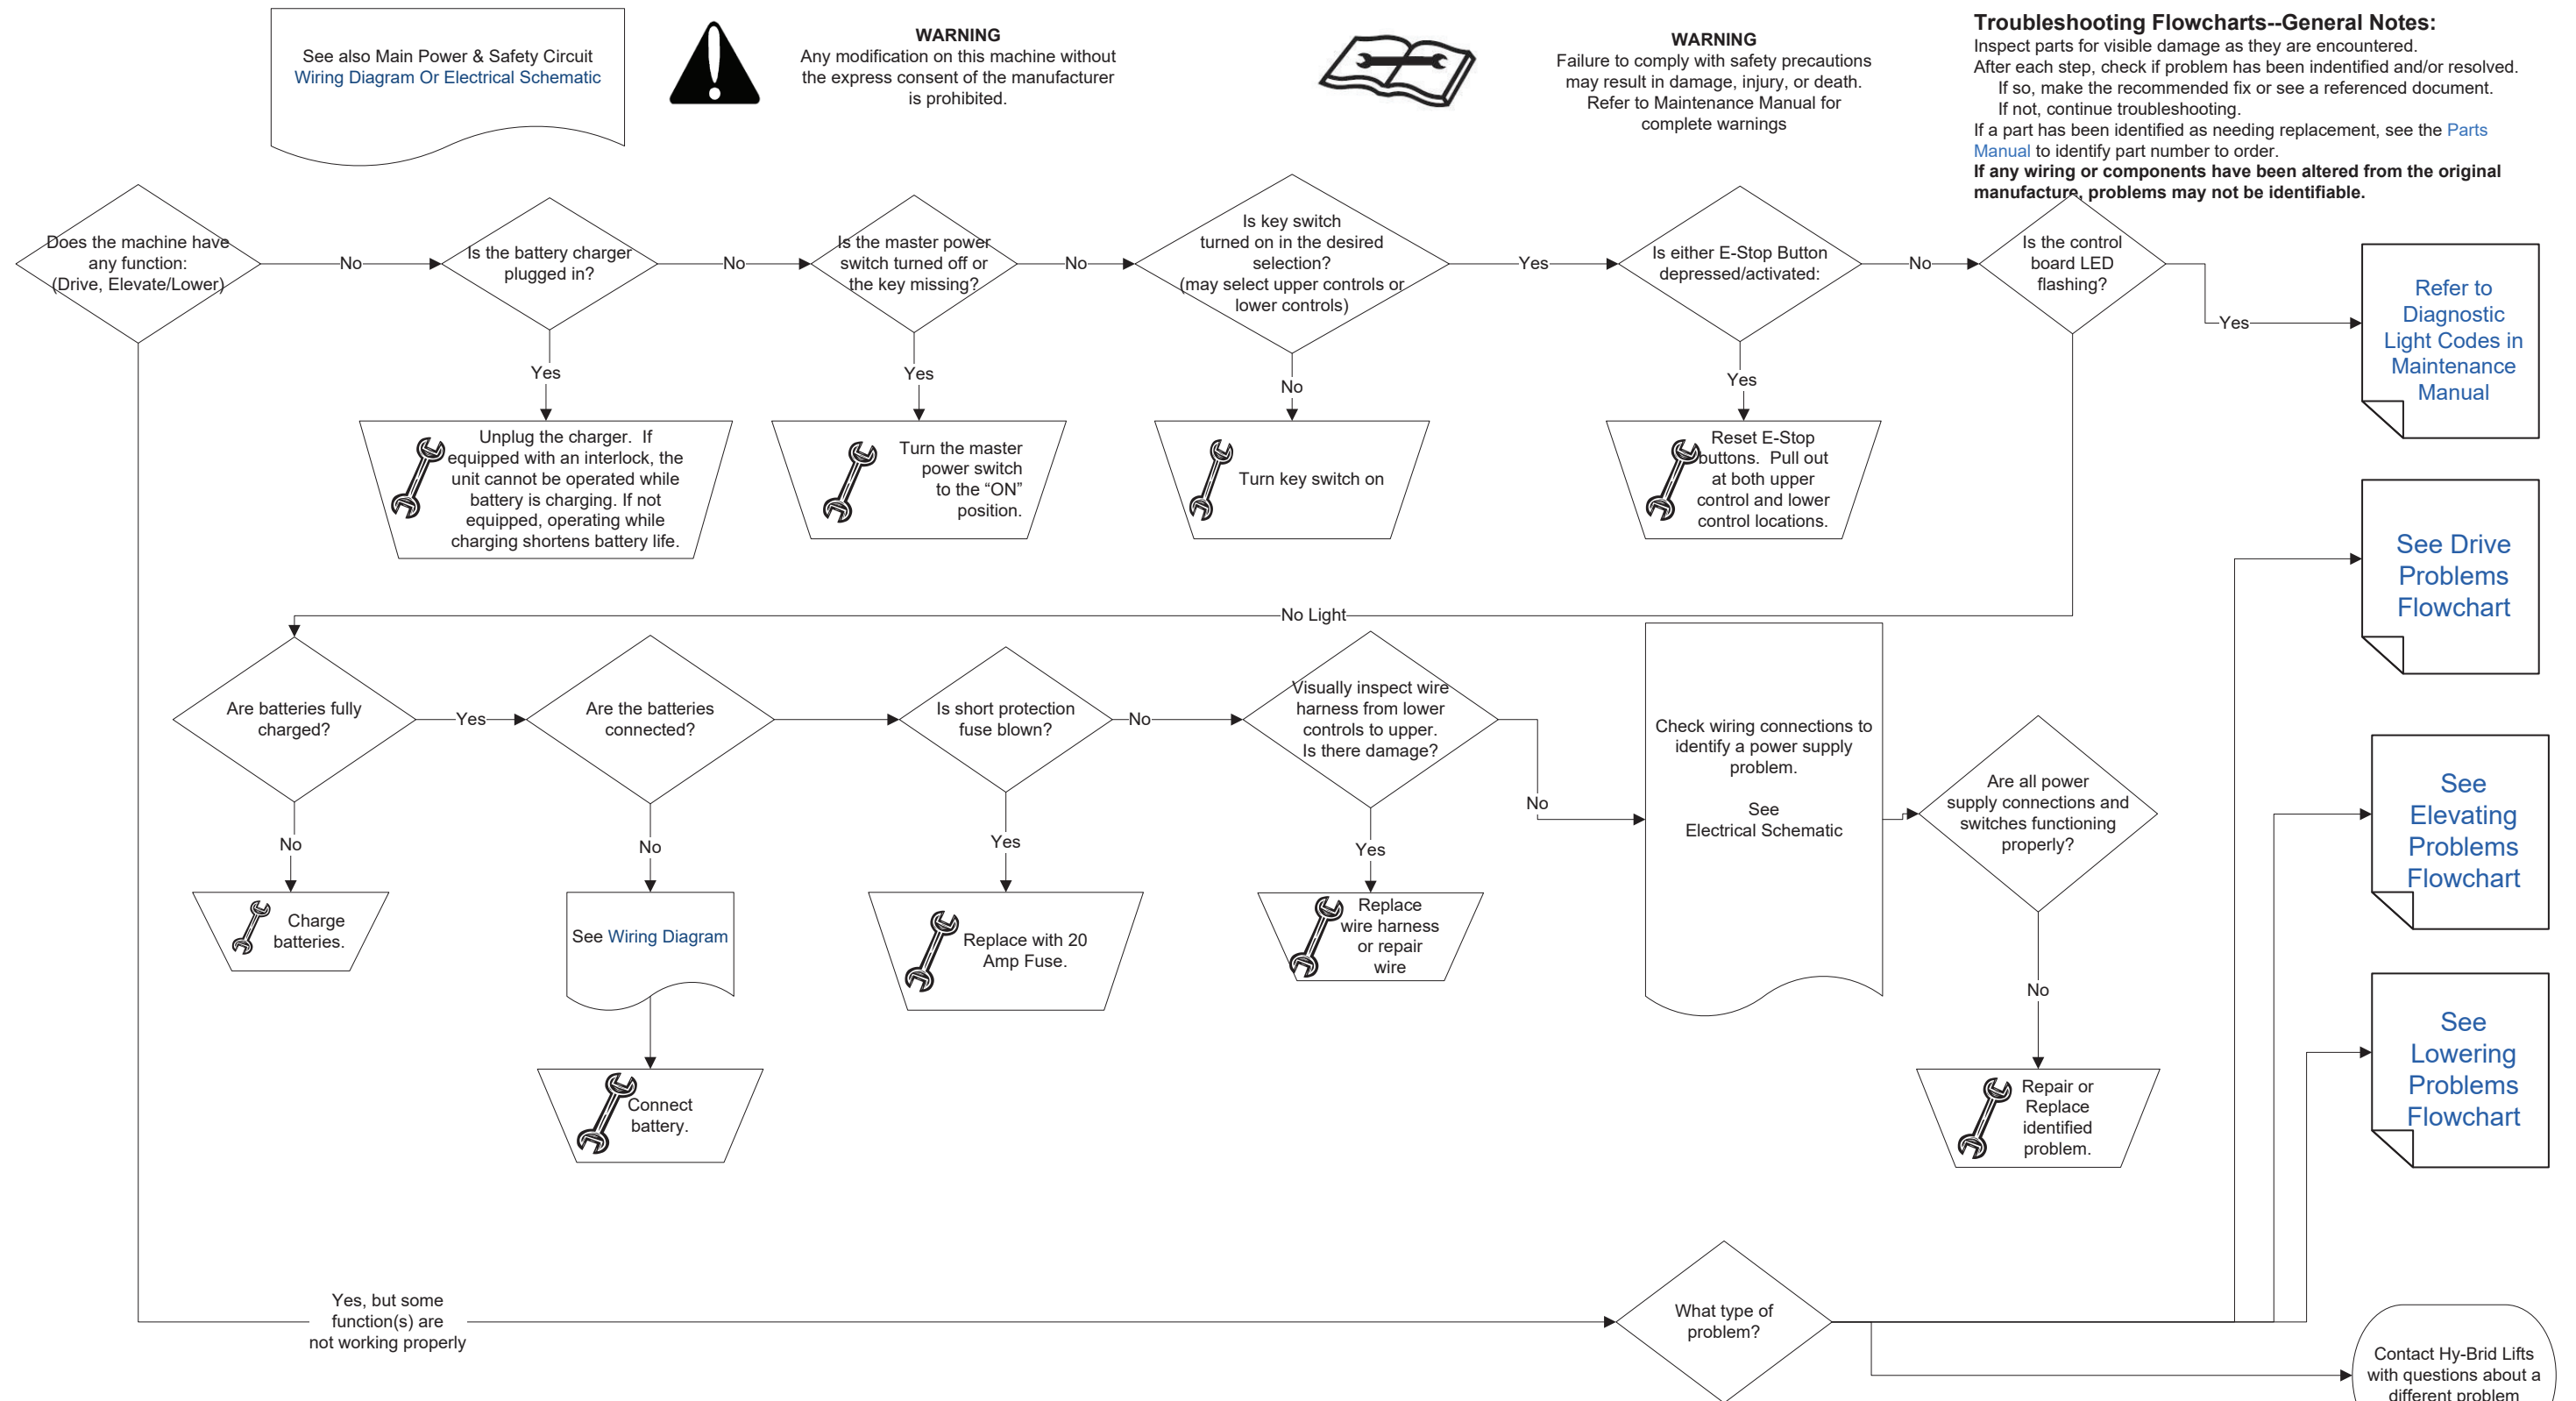



6.2 | DRIVE CIRCUIT

Troubleshooting Step 3: Drive

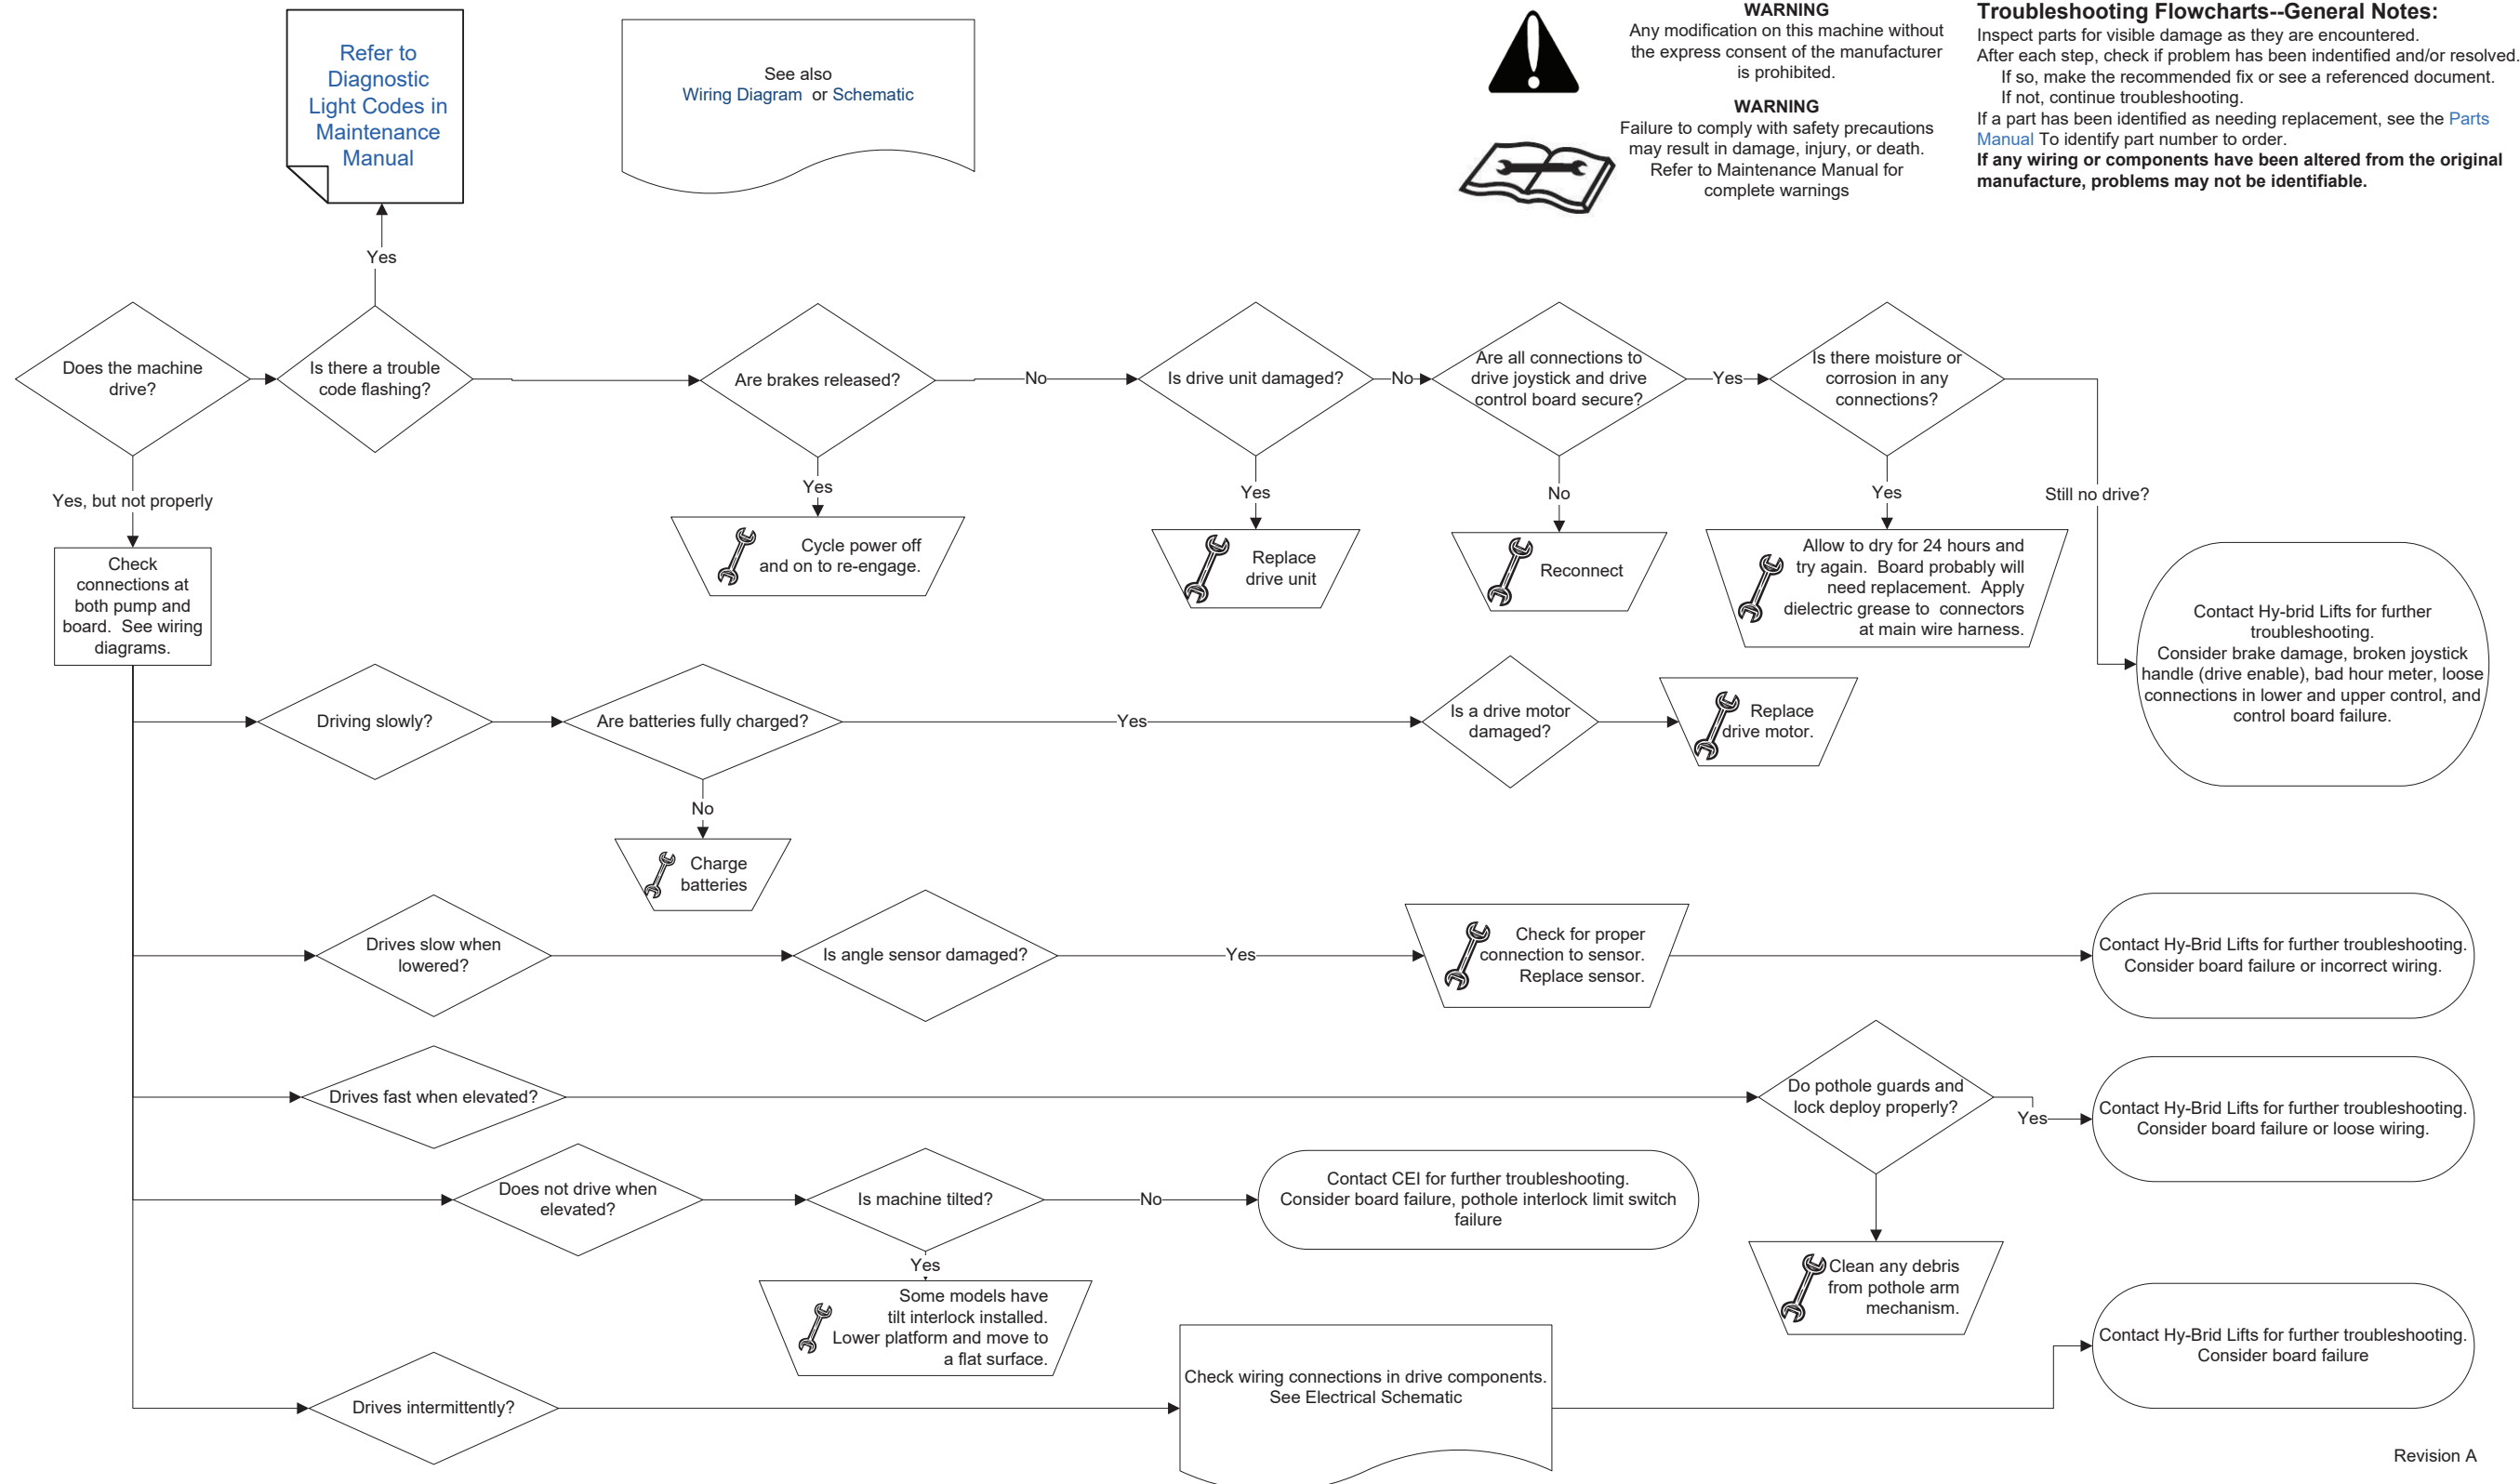

6.3 | STEER CIRCUIT


Flowchart: PRO Series-Steer




**WARNING**  
Any modification on this machine without the express consent of the manufacturer is prohibited.



**WARNING**  
Failure to comply with safety precautions may result in damage, injury, or death. Refer to Maintenance Manual for complete warnings

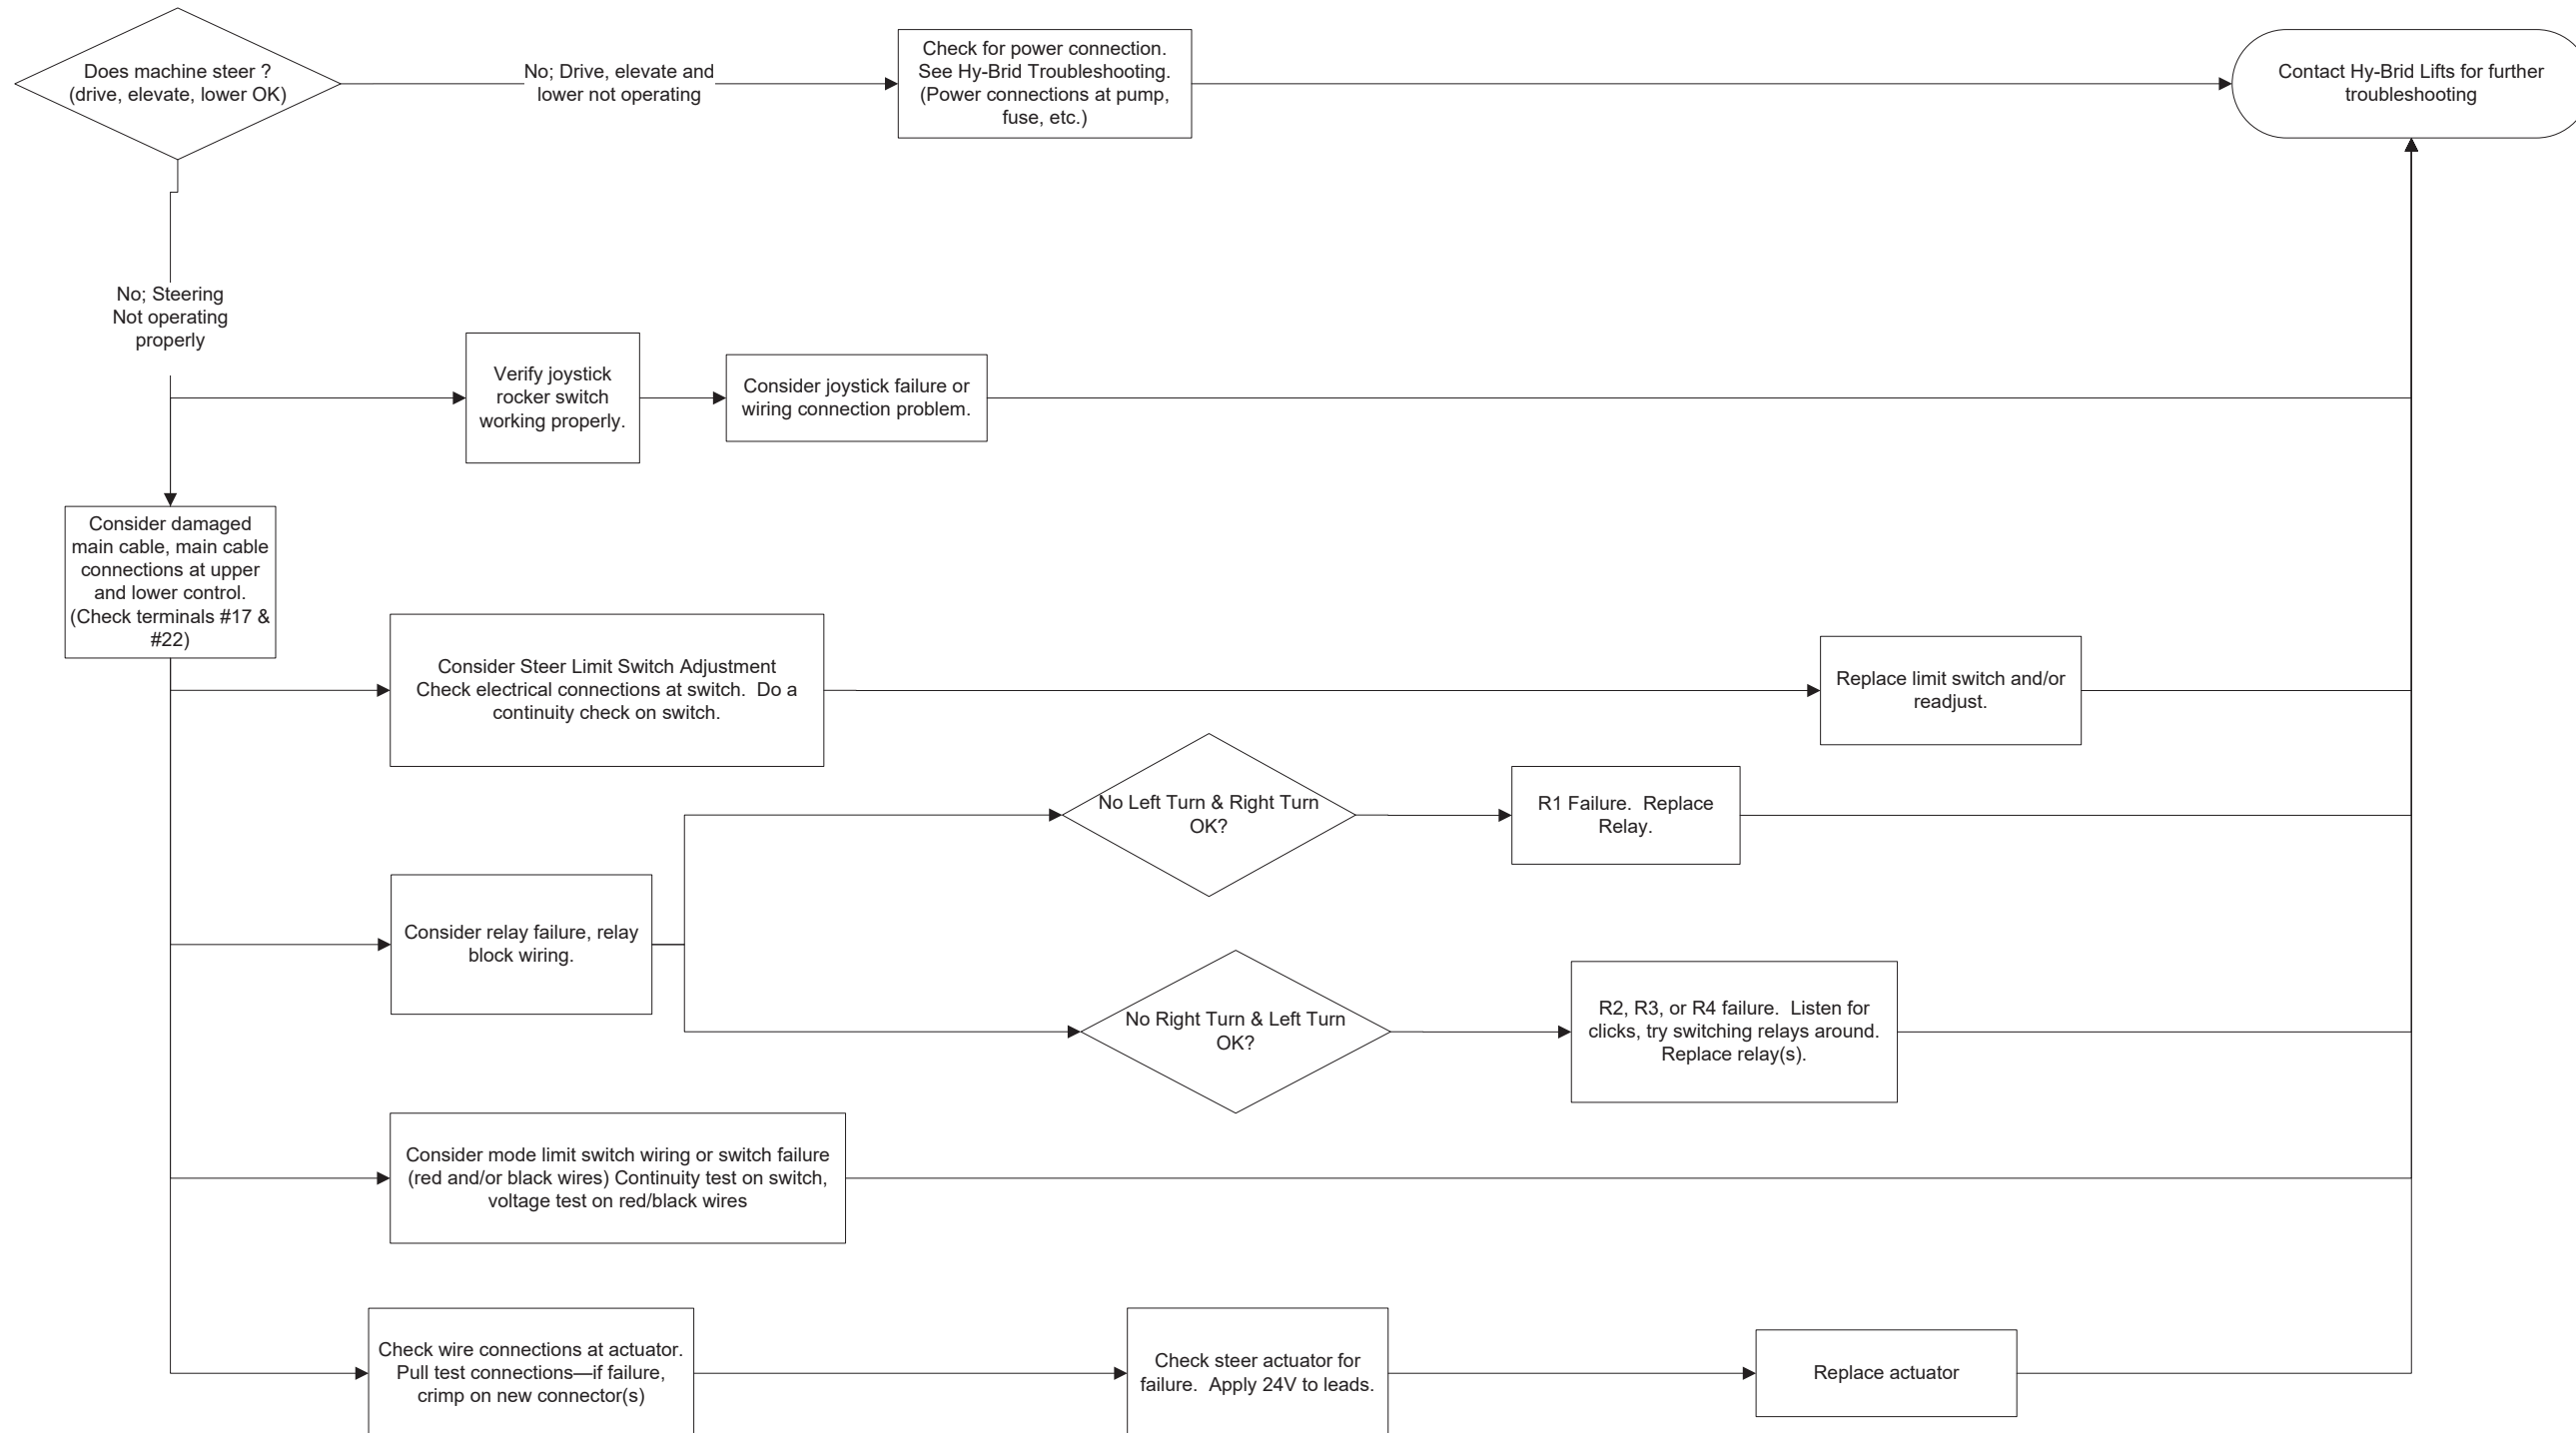


6.4 | ELEVATE CIRCUIT

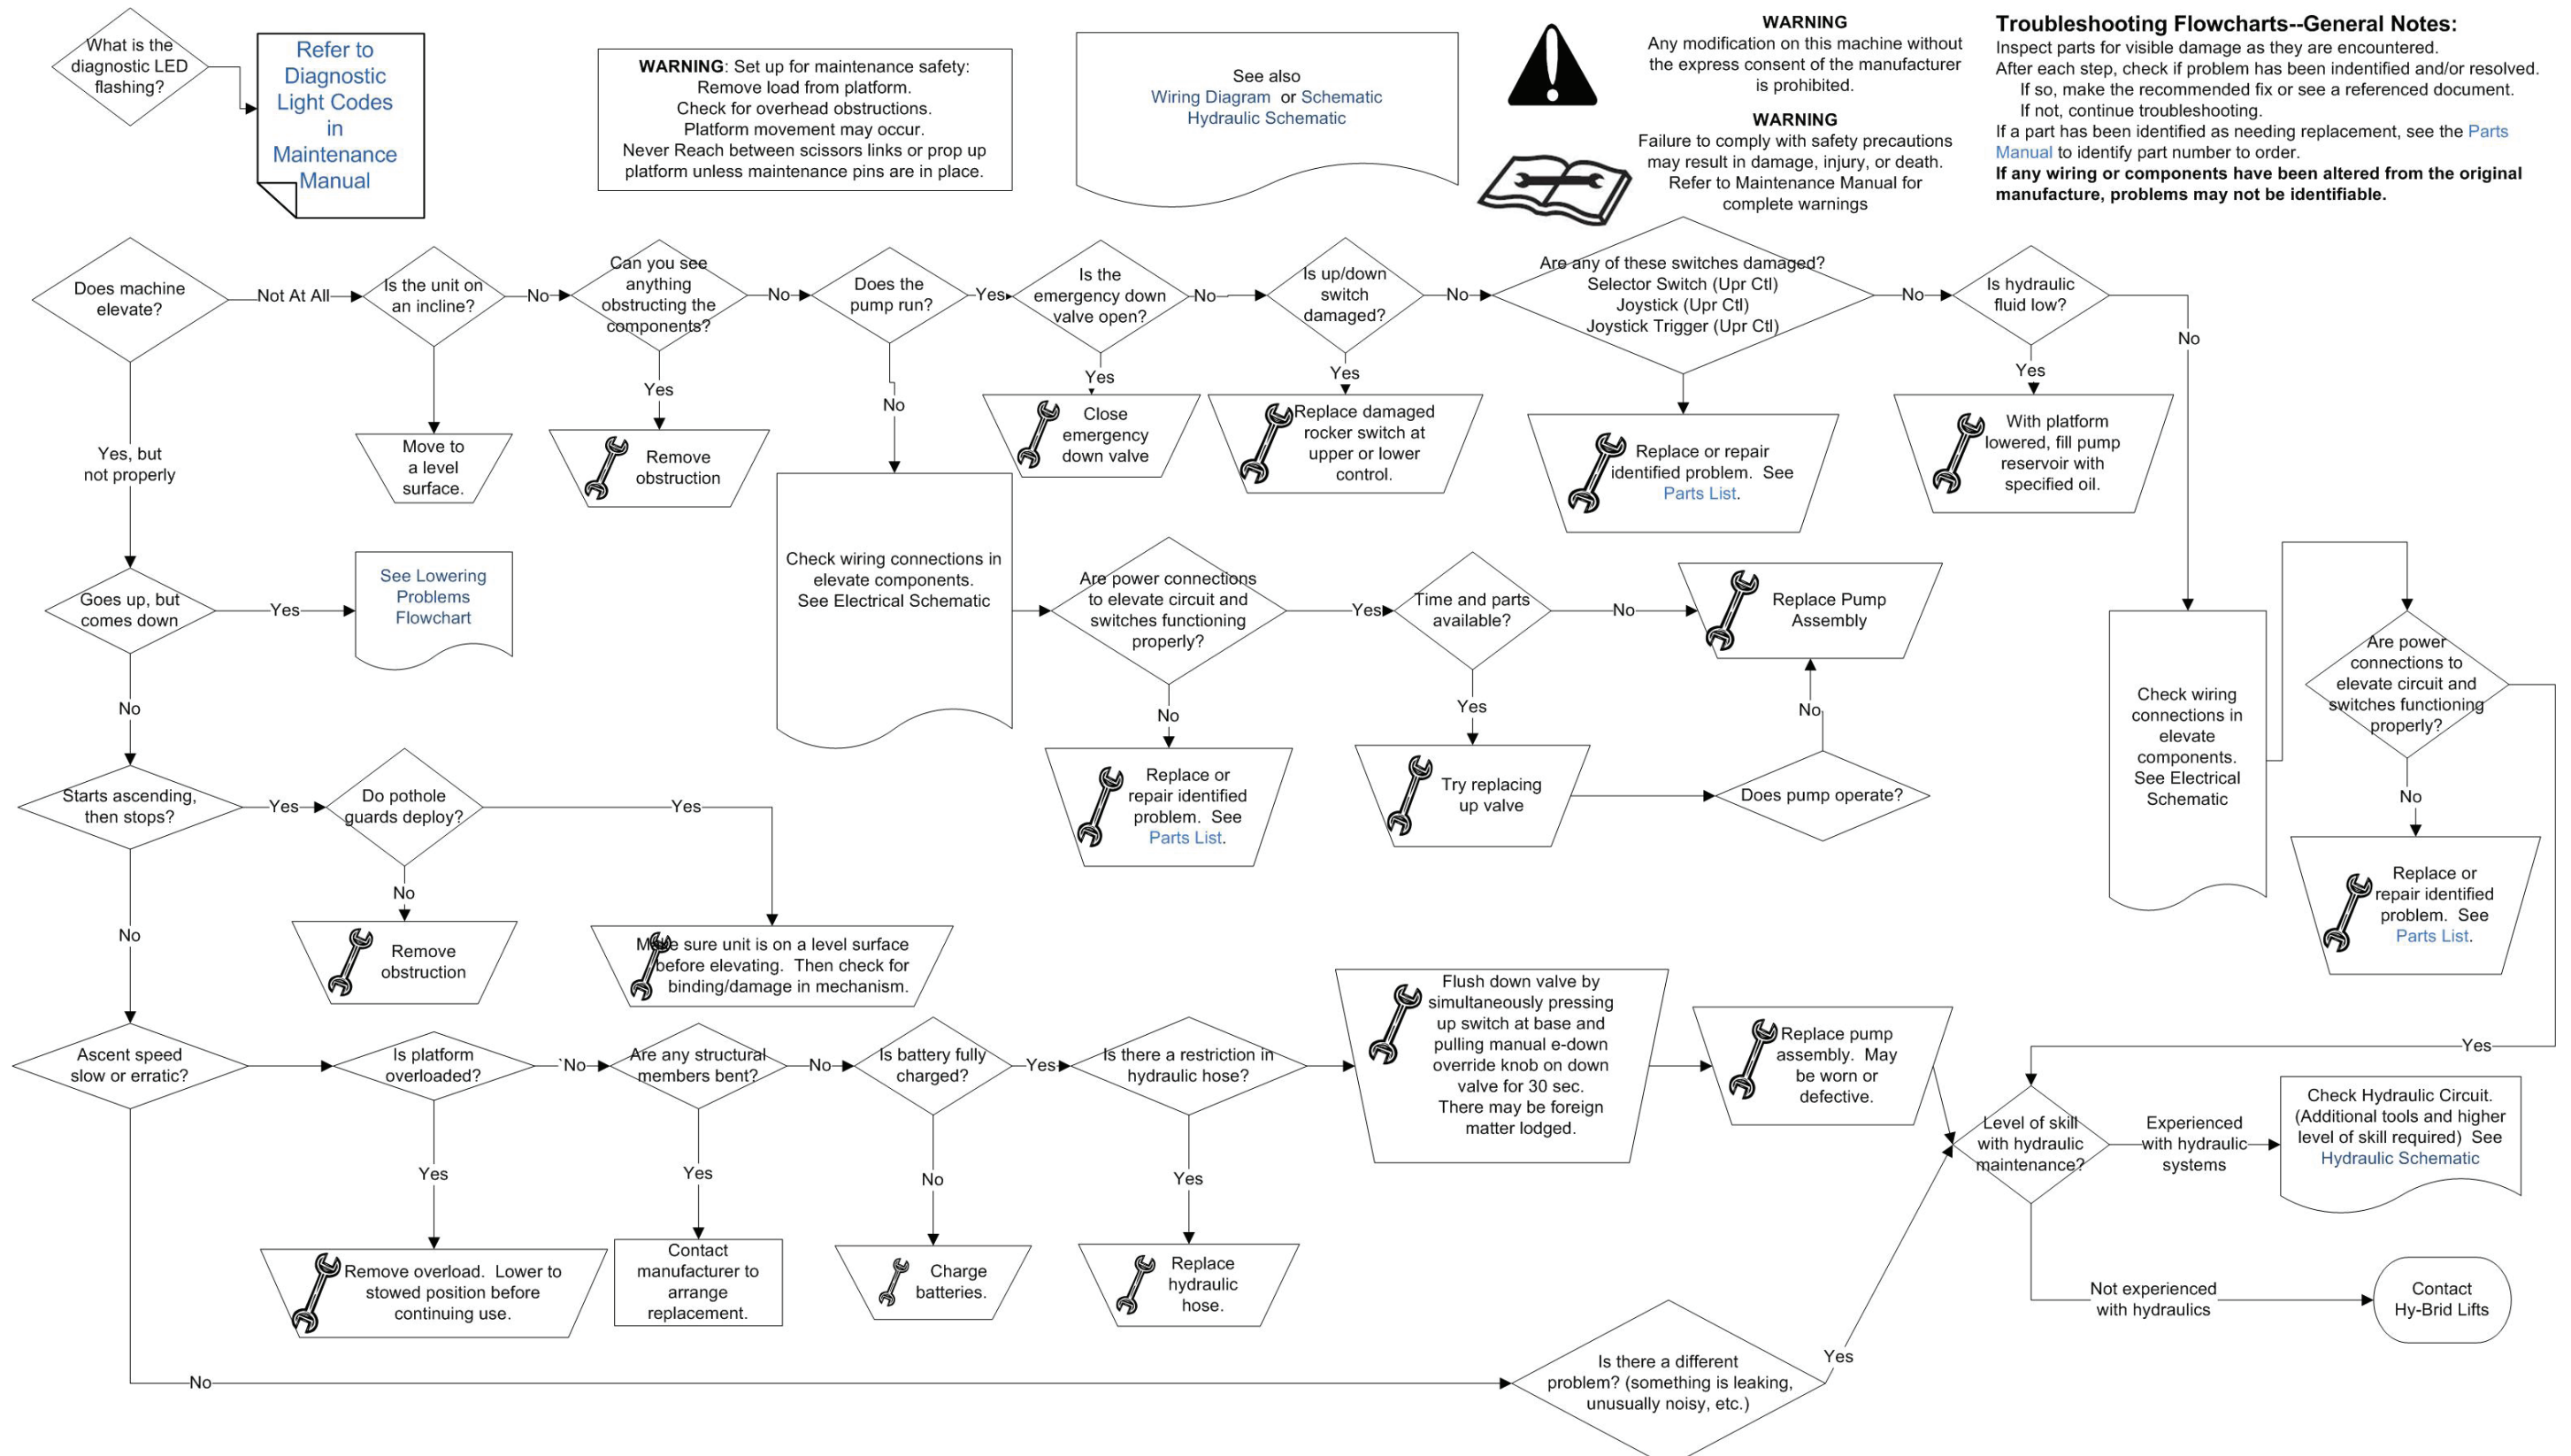

6.5 | LOWER CIRCUIT

Troubleshooting Step 01: Lowering

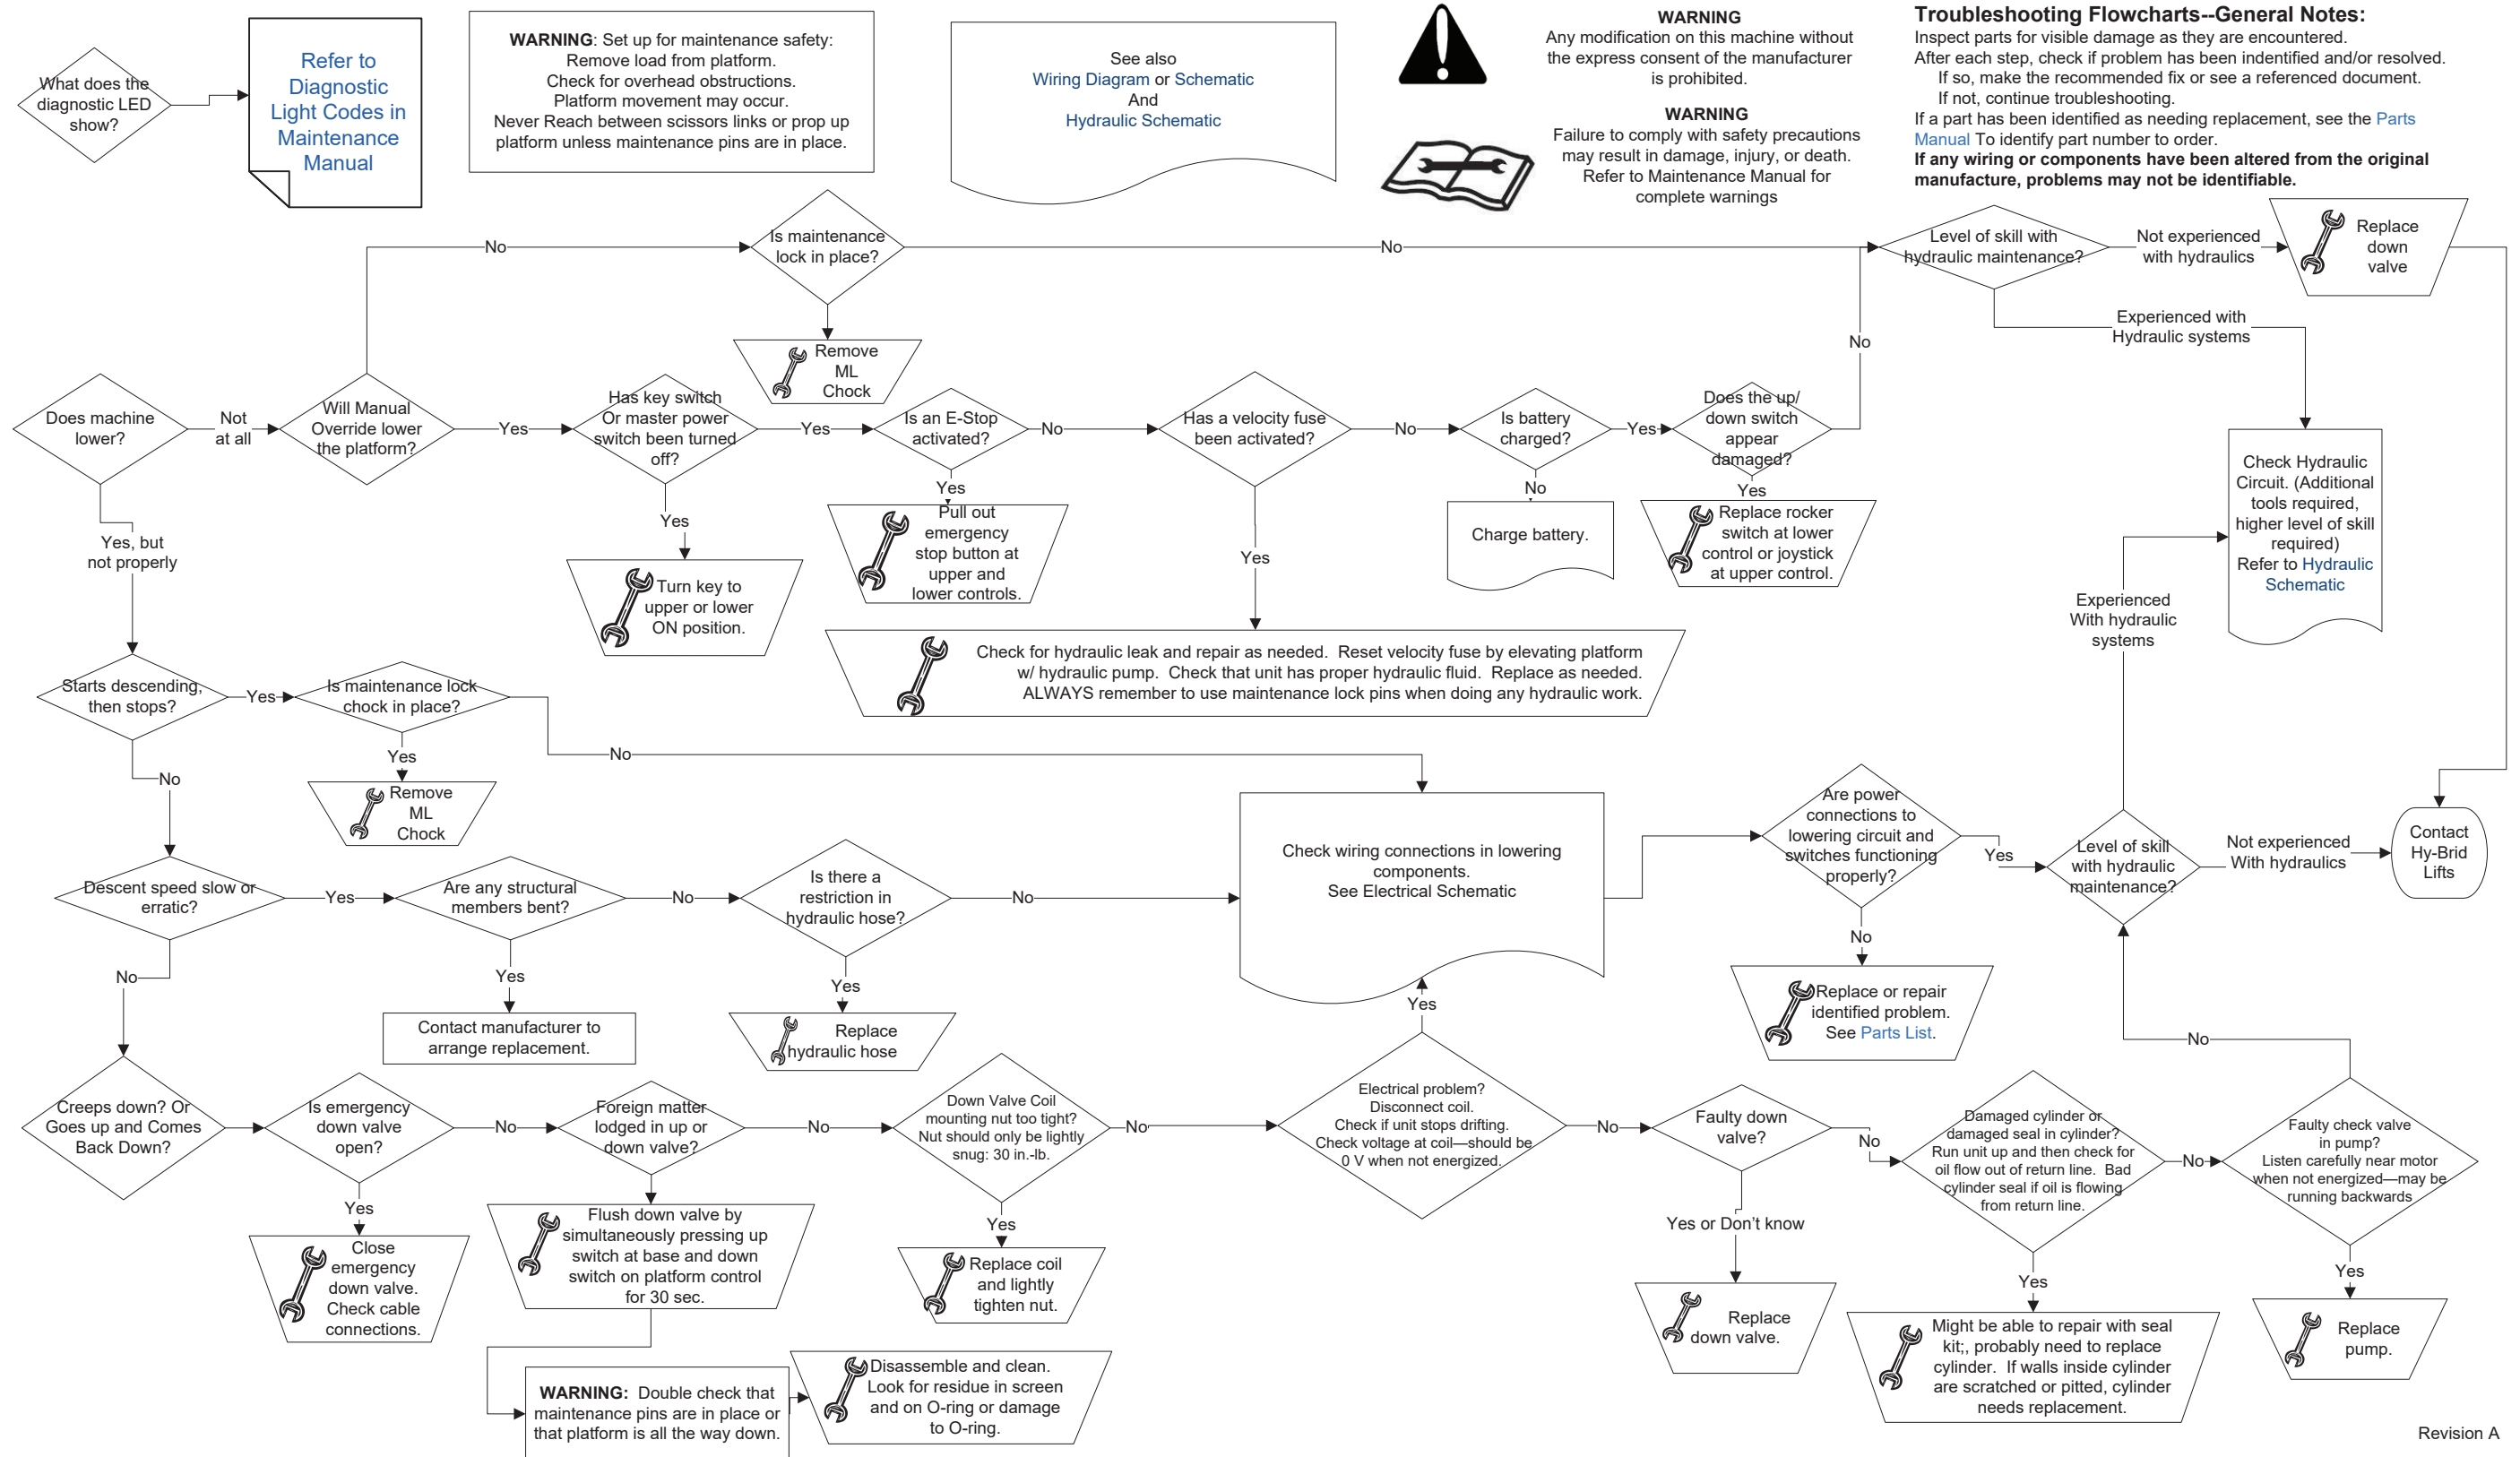

Revision A

## CAUTION

USE ONLY MANUFACTURER APPROVED REPLACEMENT PARTS. USE OF NON-OEM PARTS WILL VOID WARRANTY.

Refer to the Hy-Brid Lifts Operation and Safety Manual for decal part numbers and locations.

In addition to the decals listed in the Operation and Safety Manual, a partial list of replacement parts . These represent current model revisions. A full parts manual (part no. PS5.0-P) is available from Hy-Brid Lifts.

Refer to our website, [www.hybridlifts.com](http://www.hybridlifts.com) for more complete part listings and earlier revisions. Several parts are model-, serial number-, or manufacture date-specific. Contact your dealer for replacement part availability and pricing.

## CAUTION

REPLACEMENT OF THE FOLLOWING COMPONENTS WILL AFFECT THE STRENGTH, STABILITY, OR SAFETY FUNCTION OF THE UNIT: BATTERY (ELEC-047-4), HYDRAULIC CYLINDER (112-21-521-50-K), CONTROL BOARD (112-21-526-56-K), AND ALL STRUCTURAL COMPONENTS.

Description	Part Number	Notes
ALARM, CONTINUOUS	ELEC-635-4	
BOARD,DRIVE/LIFT PS 10ANSI S5	112-21-526-50-K	
BOARD,DRIVE/LIFT PS 14ANSI S5	112-21-526-53-K	
BOARD,DRIVE/LIFT PS 19ANSI S5	112-21-526-56-K	
BUTTON,PUSH/PULL RED E-STOP	ELEC-071-KIT	
CHARGER,24V	ELEC-795	
CORD,NEMA 5-15-P/5-15R,24 IN	ELEC-639-9	
CTL,ASM LWR PS S5, CAN	112-21-505-50	
CTL,ASM UPPR, PS S5	112-21-506-50	
ASM,MAIN CABLE CANBUS PS19 S5	112-21-531-50	
ASM,DECALS 1030 ANSI S5	112-21-520-50-K	
ASM,DECALS 1430 ANSI S5	112-21-520-53-K	
ASM,DECALS 1930 ANSI S5	112-21-520-56-K	
DRIVE MOTOR,24VELE,HB AUB	ELEC-790	
HYDRAULIC OIL	HYDR-032	Not available as a replacement part. Replace with Flomite #150, Dexron II, Mobil-DTE 2 or equivalent.
KEY,SPARE	ELEC-310EKEY	
MANUAL BOX	HARD-603	
E-STOP ASM, ALBRIGHT 250A	ELEC-308	
KEY SWITCH,3POS, 20A 12V	ELEC-310	
SWITCH,LIMIT,ROT LVR,NO/NC PO	ELEC-123-5	
SWITCH,ROCKER DPDT	ELEC-133B	
WHL,12X4 NM RUBBER W/HUB	WHEE-625-KIT	
WHL,12X4,NM RUBBER GRAY	WHEE-624	
ASM,CYL PS 19/14 S5	112-21-521-50-K	
MANUAL,OPERATORS PS S5	PS5.0-S	

**8.1 | LIMITED WARRANTY****Warranty Statement - Two Year Agreement****8.2 | LIMITED WARRANTIES**

Subject to the terms, conditions and limitations set forth herein, Custom Equipment, LLC (the "Company") warrants to the first end-user ("Buyer") that:

**Limited Product Warranty**

For a period of 24 months from the date that a new product manufactured by the Company ("Product") is delivered to the Buyer, the Product will (i) conform to the specifications published by the Company for such Product as of the date of delivery; and (ii) be free of any defect in material and/or workmanship under normal use and maintenance; and

**Extended Structural and Chassis Warranty**

For a period of 60 months from the date that the Product is delivered to the Buyer, the chassis and other structural components of such Product will be free from defects in material and/or workmanship under normal use and maintenance.

**8.3 | EXCLUSIONS/WHAT IS NOT COVERED****The following items are NOT covered under this Limited Warranty:**

Defects in, and damage or loss relating to, any batteries incorporated by the Company into or made a part of the Product. Any such defects, damage or loss shall be exclusively covered by the battery manufacturer's warranty, if any. For more information regarding the battery warranty, the Buyer should contact the battery manufacturer using the contact information shown on the battery;

Damage or loss resulting from or caused by carrier handling;

Damage or loss resulting from or caused by normal wear and tear, weathering, lack of use or use with incompatible equipment or software;

Damage resulting from or caused by improper maintenance, improper handling or storage, improper use, abuse, neglect, operation beyond rated capacity, or operation after discovery of defective or worn parts;

Any part, component or assembly altered or modified in any way not approved in writing by the Company;

Damage to any equipment or parts not manufactured by the Company; and Acts of God, accidents or any other causes beyond the Company's reasonable control.

**8.4 | MAKING A WARRANTY CLAIM**

As a prerequisite to making any claim under this Limited Warranty, Buyer must give the Company written notice of any suspected defect promptly after discovery. Such notice shall specifically identify the suspected defect, the original delivery date and complete Buyer identification and location information. The Company will not accept any Product for warranty service without receiving Buyer's written notice and issuing a return goods authorization. If requested by the Company, Buyer shall return the defective Product, or parts, components or assemblies thereof, to the Company, F.O.B. Company's designated location. All returned Products or parts, components or assemblies thereof that are replaced under this Limited Warranty shall become the property of the Company. The Company reserves the right to review Buyer's maintenance and operation records and procedures to determine if the alleged defect(s) were due to any of the items listed in Sections 8.3 of this Limited Warranty. The Company shall not be liable for any claim under this Limited Warranty if Buyer fails to satisfy the conditions set forth in this Section.

**8.5 | EXCLUSIVE WARRANTY REMEDIES****Exclusive Repair or Replace Remedy**

The Company's sole obligation and Buyer's exclusive remedy with respect to any defect in the Product occurring during the warranty periods set forth in Section 8.1 of this Limited Warranty shall be for the Company, at its option, to repair or replace (or have one of its designated authorized dealers repair or replace) the Product or part, component or assembly thereof that contains a defect in materials or workmanship. The Company reserves the right, at its discretion, to use new, re-manufactured or refurbished replacement parts. Notwithstanding anything in this Limited Warranty to the contrary, the Company shall not be obligated to replace the entire Product if a covered defect can be remedied by the repair or replacement of a defective part, component or assembly. The Company shall be responsible for the cost of all parts and labor charges, up to the Maximum Labor Amount determined in accordance with Section 8.5 of this Limited Warranty, necessary to remedy such defect.

**Labor Charges**

If field repairs or parts replacement are necessary on any Product covered by this Limited Warranty, the Company will reimburse its designated authorized dealer for those direct labor costs incurred to perform such field repairs or parts replacement up to the maximum amount specified in the Company's current Field Service Rate (hereinafter, the "FSR") or in any 'Flat Rate Guides' or similar agreement established with the authorized dealer (such maximum amount shall be referred to in this Limited Warranty as the "Maximum Labor Amount"). Current versions of the Company's FSR and Flat Rate Guides are incorporated by reference into this Limited Warranty. For a current copy of the Company's FSR and Flat Rate Guides, Buyer should contact the Company at 1-866-334-0756. Buyer shall be responsible for any costs or fees due to the authorized dealer in excess of the Maximum Labor Amount.

**8.6 | DISCLAIMER OF OTHER EXPRESS AND IMPLIED WARRANTIES**

Except for the limited warranties set forth in section 1 above, the company makes no other representations or warranties and hereby disclaims all express or implied representations or warranties regarding the product, including, without limitation, any implied warranty of merchantability, non-infringement of proprietary or third-party rights or fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof. No employee or representative of the company or any of its authorized dealers is authorized to modify any term, condition or limitation in this limited warranty unless such modification is made in writing and signed by an officer of the company.

**8.7 | LIMITATION OF LIABILITY**

Notwithstanding anything in this warranty to the contrary, in no event shall the company or any of its affiliates or subsidiaries be liable to buyer for any indirect, special, exemplary, punitive or consequential damages (including lost profits, lost revenue, down time, loss of business opportunity or other economic losses), whether in an action in contract or tort (including negligence and strict liability) or otherwise, even if the company has been specifically advised of the possibilities of such damages.

Version 1.15.16

DATE	COMMENTS

DATE	COMMENTS

DATE	COMMENTS

DATE	COMMENTS



# **HY-BRID LIFTS™**

BY CUSTOM EQUIPMENT LLC

Self-Propelled  
Mobile Elevated Work Platform  
PS-1030, PS-1430, PS-1930

Maintenance & Troubleshooting  
Manual

Custom Equipment, LLC  
2647 Highway 175  
Richfield, WI 53076  
U.S.A.

☎ +1.262.644.1300

📠 +1.262.644.1320

🌐 [hybridlifts.com](http://hybridlifts.com)

“Hy-Brid Lifts” is a trademark of Custom Equipment, LLC. These machines comply with ANSI/SIA A92.20 and CSA B354.6:17.

Revision Date: January 2022

Printed in the U.S.A.